


UL316-27

**9 x 3W - RGB-DMX -12VAC/24VDC
Dry or Submersible Cast 316L SS
Replaceable LEDs**



Optional Tripod

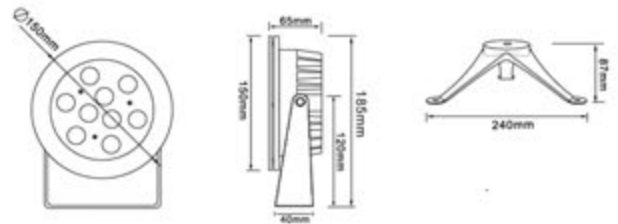

Specifications

| | |
|----------------------|--|
| Input voltage | 12VAC or 24VDC |
| Output power | 27 watts (9X3W) |
| Luminous flux output | 100 to 110 lm/W |
| Rendering Index | >70rA (warm white) |
| Beam angle | 10-15 degrees - optional 25,45,60,90 |
| LEDs | Replaceable - Internal Driver |
| Material | Cast 316L STAINLESS STEEL silicone gasket - tempered glass lens |
| Face ring | Standard 'sparkle matt' SS or mirror polish w/ niche |
| Color options | RGB-DMX |
| White | CREE- XPE - 2700K TO 6500K |
| LEDs operating life | > 50,000 hours REPLACEABLE LEDs |
| IP rating | IP68 - CERTIFIED SUBMERSIBLE OR DRY |
| Cable | 9 FEET- SOW 18/5 - longer lengths can be ordered |
| Dimensions | Diameter 5.9"x 2.5" |
| Certifications | cULus CSA22.2 no.89 - including swimming pools and splash pads |
| Installation | Submersible or Dry |

