
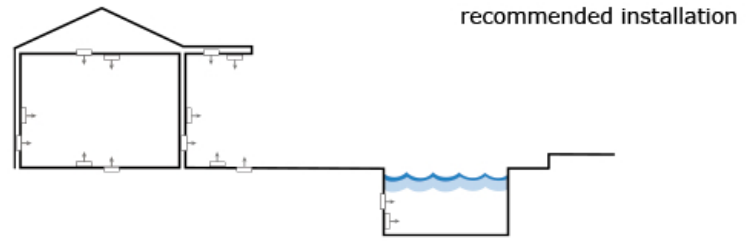
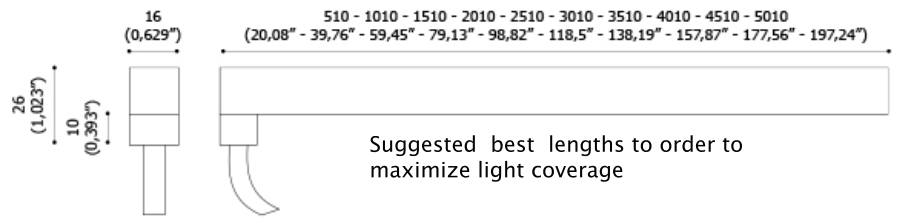


E- FLEX - 24VDC

Unmei LEDs - LED Lighting & Circuitry

Available in solid or dimmable whites, RGB and RGBW-DMX
 Top Bend or Side Bend
 Fully submersible and UL listed for SWIMMING POOLS

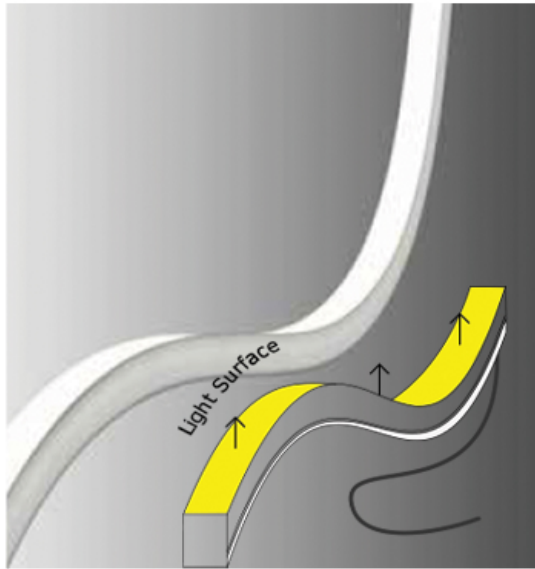

PRODUCT DESCRIPTION:

Professional bendable lighting for indoor or outdoor installations
 SS clips or our new SS flexible channel in 19" connecting sections

TECHNICALS FEATURES:

Materials	Nano-polymer resins	
Power Supply	24 Vdc constant voltage ($\pm 5\%$)	
Power	15 W/m up to 19W/M	
Light Source	120 SMD LED/m	
Pitch	8,3 mm (0,326")	
Colour Temperature	2700 K; 3000 K; 3500 K; 4500 K	
Lifetime	> 50000 h (TM21)	
Optics	Transparent or opal diffuser	
Tc body	< 75 °C (167 °F)	
Ta operating temperature	- 30 ÷ 50 °C (-22 ÷ 122 °F)	
Ts surface temperature	≤ 65 °C (149 °F)	
Ti suitable installation temperature	15 ÷ 40 °C (59 ÷ 104 °F)	
Storage temperature	-30 ÷ 85 °C (-22 ÷ 185 °F)	
Functions	On/Off ; dimmable	
Cable	AWM style 20233 2x 0,75mm ² AWG18 (red-black) ext ø 5,2 mm (0,205") L. 1 m (3,28 ft)	
Weigth	300 g/m (3,22 oz/ft)	
Installations	Recessed or surface mounted (floor, wall, ceiling) SS clips every 10" or flexible SS channel (19.7" linkable sections)	

