
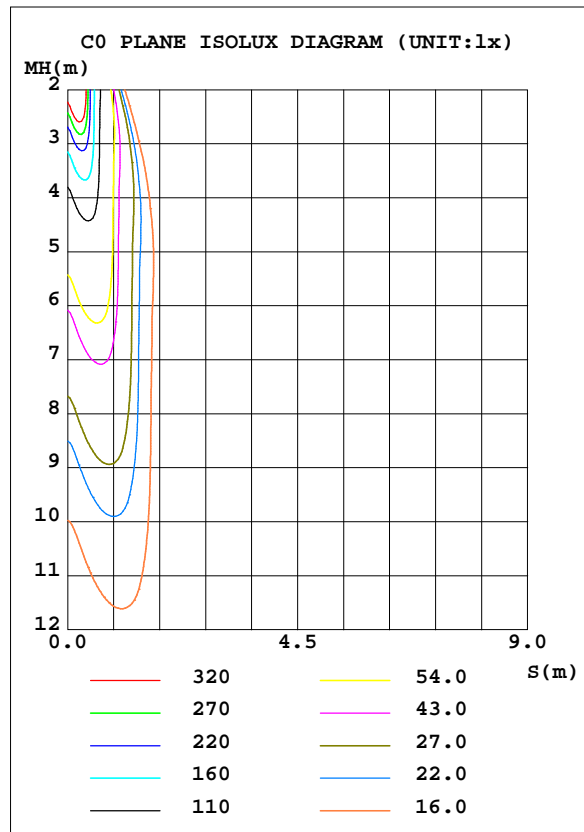


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 49.10 lm/W			
MODEL		I _{max} (cd)	2665	S/MH(C0/180)	0.47
NOMINAL POWER(W)	11.4	LOR(%)	100.0	S/MH(C90/270)	0.50
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	559.72	η UP, DN(C0-180)	1.4, 50.6
NOMINAL FLUX(lm)	559.719	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7, 46.3
LAMPS INSIDE	1	η up(%)	3.1	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24	η down(%)	96.9	CIBSE SHR MAX	0.30

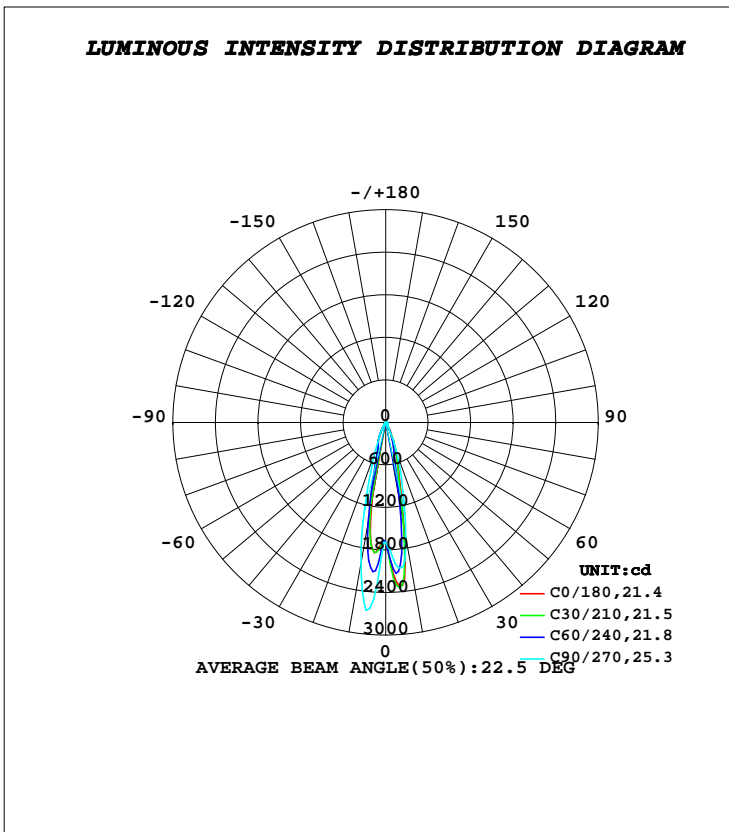

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1490	1283	1627	1695	1138	1342	2012	1229	0- 10	178.9	178.9	32,32
20	424.5	349.2	462.0	448.9	334.8	326.4	435.9	290.8	10- 20	199.7	378.6	67.6,67.6
30	87.98	66.98	68.47	84.33	82.55	108.0	93.82	71.02	20- 30	90.75	469.4	83.9,83.9
40	31.04	31.08	34.45	32.87	31.17	30.68	32.16	29.01	30- 40	29.10	498.5	89.1,89.1
50	21.00	20.22	21.52	21.67	19.89	18.79	18.73	17.95	40- 50	19.35	517.8	92.5,92.5
60	11.20	10.81	9.917	10.33	12.87	10.32	9.884	9.359	50- 60	13.38	531.2	94.9,94.9
70	4.465	4.157	4.193	4.637	6.169	5.208	4.651	4.323	60- 70	7.263	538.5	96.2,96.2
80	0.9098	0.6324	0.7605	1.103	1.977	2.082	1.693	1.552	70- 80	2.900	541.4	96.7,96.7
90	0.2600	0.2981	0.2584	0.2142	1.437	1.376	1.268	1.361	80- 90	1.026	542.4	96.9,96.9
100	0.6130	0.7222	0.7221	0.5659	1.425	1.369	1.322	1.409	90-100	0.9734	543.4	97.1,97.1
110	1.558	1.859	1.487	1.398	1.621	1.572	1.565	1.579	100-110	1.336	544.7	97.3,97.3
120	2.555	2.188	1.961	2.000	2.371	2.246	2.080	2.160	110-120	1.883	546.6	97.7,97.7
130	2.407	2.479	2.441	2.380	3.074	2.921	2.874	2.980	120-130	2.134	548.7	98,98
140	4.032	4.135	3.915	3.638	4.654	4.259	4.107	4.109	130-140	2.539	551.3	98.5,98.5
150	6.245	6.048	5.729	5.490	6.651	6.216	5.862	5.762	140-150	3.145	554.4	99.1,99.1
160	7.242	6.791	6.574	6.554	7.839	7.335	6.826	6.349	150-160	3.025	557.4	99.6,99.6
170	5.811	5.446	5.289	5.380	6.275	6.064	5.461	5.068	160-170	1.820	559.2	99.9,99.9
180	4.355	4.494	4.316	4.247	4.442	4.423	4.311	4.255	170-180	0.4708	559.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

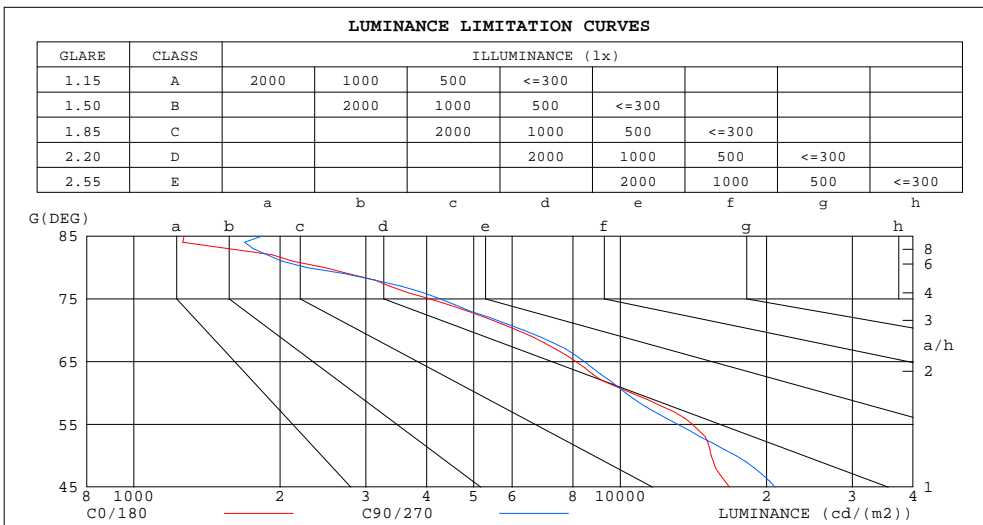

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1268	1833
80	2468	2267
75	4064	4269
70	6150	6346
65	8116	8445
60	10556	10267
55	14089	13146
50	15394	17329
45	16768	20831


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.02	1.01	.00	.99	.98	.96	.95	.94	.92
2.0	1.05	1.01	.98	1.03	.00	.97	.99	.97	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.99	.95	.92	.98	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.84
4.0	.94	.90	.86	.93	.89	.86	.91	.87	.84	.88	.85	.83	.86	.84	.82	.80
5.0	.90	.85	.82	.89	.85	.81	.87	.83	.81	.85	.82	.80	.84	.81	.79	.77
6.0	.87	.82	.78	.86	.81	.78	.84	.80	.77	.82	.79	.76	.81	.78	.76	.74
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.78	.75	.73	.72
8.0	.80	.76	.72	.80	.75	.72	.78	.74	.72	.77	.74	.71	.76	.73	.71	.70
9.0	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.75	.71	.68	.75	.70	.67	.74	.70	.67	.73	.69	.67	.72	.69	.66	.65

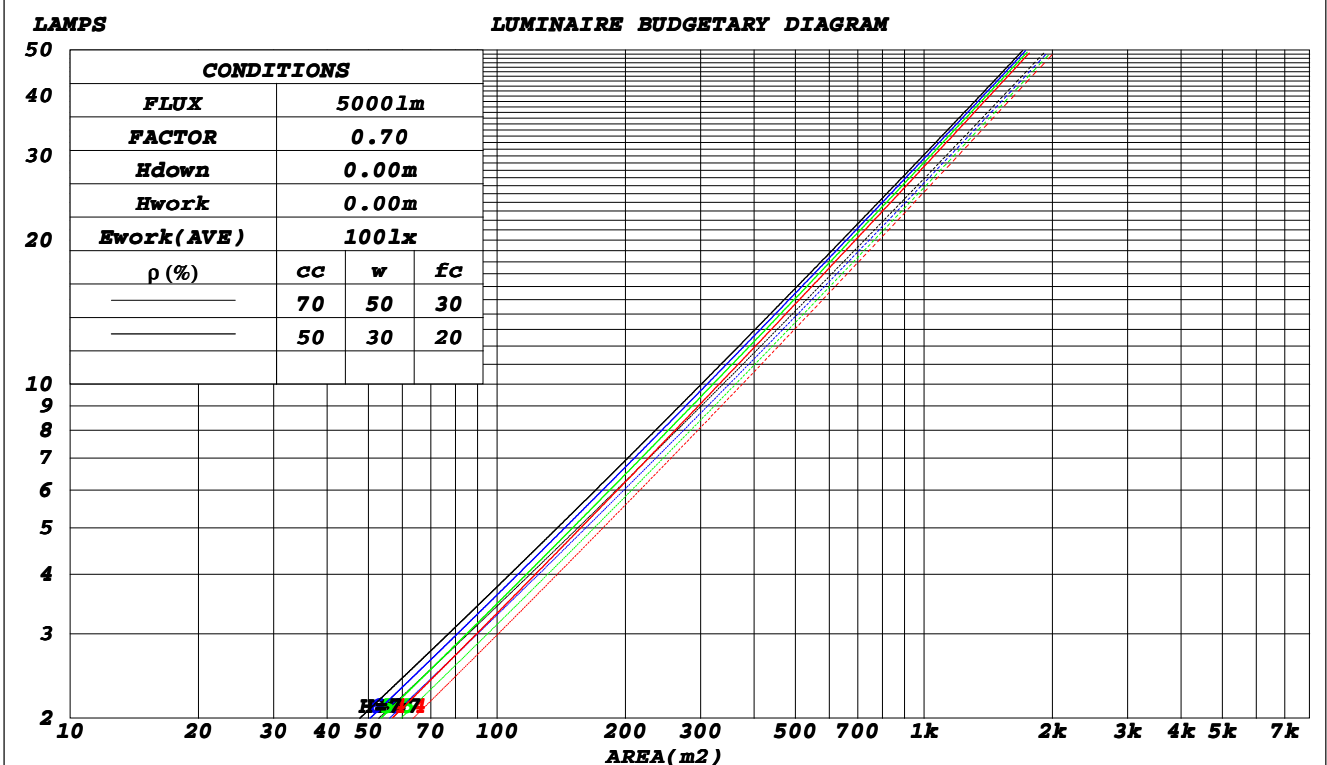

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

WEC AND CCEC

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.158	.090	.029	.151	.086	.027	.137	.078	.025	.124	.071	.023	.111	.065	.021	
2.0	.148	.081	.025	.141	.078	.024	.129	.072	.022	.118	.066	.021	.108	.061	.019	
3.0	.138	.073	.022	.133	.071	.021	.122	.066	.020	.113	.062	.019	.104	.058	.018	
4.0	.129	.067	.020	.124	.065	.019	.116	.061	.018	.107	.058	.017	.100	.054	.016	
5.0	.121	.062	.018	.117	.060	.018	.109	.057	.017	.102	.054	.016	.096	.051	.015	
6.0	.114	.057	.016	.111	.056	.016	.104	.053	.016	.098	.051	.015	.092	.048	.014	
7.0	.108	.053	.015	.105	.052	.015	.099	.050	.014	.093	.048	.014	.088	.046	.013	
8.0	.103	.050	.014	.100	.049	.014	.094	.047	.013	.089	.045	.013	.085	.043	.013	
9.0	.098	.047	.013	.095	.046	.013	.090	.045	.013	.086	.043	.012	.081	.041	.012	
10.0	.093	.045	.012	.091	.044	.012	.086	.042	.012	.082	.041	.012	.078	.039	.011	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.214	.214	.214	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.194	.181	.170	.166	.156	.146	.113	.107	.101	.065	.062	.059	.021	.020	.019	
2.0	.177	.157	.139	.152	.135	.120	.104	.093	.084	.060	.054	.049	.019	.018	.016	
3.0	.163	.137	.117	.140	.119	.101	.096	.082	.071	.055	.048	.042	.018	.016	.014	
4.0	.151	.122	.100	.130	.106	.087	.089	.074	.061	.052	.043	.036	.017	.014	.012	
5.0	.141	.111	.088	.122	.096	.076	.084	.067	.054	.048	.039	.032	.016	.013	.011	
6.0	.133	.101	.078	.114	.087	.068	.079	.061	.048	.046	.036	.028	.015	.012	.009	
7.0	.126	.093	.070	.108	.081	.061	.075	.056	.043	.043	.033	.026	.014	.011	.009	
8.0	.119	.086	.064	.103	.075	.056	.071	.053	.039	.041	.031	.023	.013	.010	.008	
9.0	.113	.081	.059	.098	.070	.051	.068	.049	.036	.039	.029	.022	.013	.010	.007	
10.0	.108	.076	.055	.094	.066	.048	.065	.047	.034	.038	.027	.020	.012	.009	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.6	16.3	15.8	16.5	16.7	15.4	16.2	15.7	16.4	16.6
3H	16.0	16.7	16.3	17.0	17.2	15.9	16.6	16.2	16.9	17.1
4H	16.1	16.8	16.4	17.0	17.3	16.0	16.7	16.3	16.9	17.2
6H	16.1	16.7	16.4	17.0	17.3	16.0	16.6	16.3	16.9	17.2
8H	16.0	16.6	16.4	16.9	17.3	16.0	16.5	16.3	16.9	17.2
12H	16.0	16.6	16.4	16.9	17.2	15.9	16.5	16.3	16.8	17.1
4H 2H	15.8	16.5	16.1	16.7	17.0	15.7	16.3	16.0	16.6	16.9
3H	16.3	16.9	16.7	17.2	17.6	16.3	16.8	16.6	17.2	17.5
4H	16.4	17.0	16.8	17.3	17.7	16.4	16.9	16.8	17.2	17.6
6H	16.4	16.9	16.8	17.3	17.7	16.3	16.8	16.8	17.2	17.6
8H	16.4	16.8	16.8	17.2	17.7	16.3	16.7	16.7	17.1	17.6
12H	16.3	16.7	16.8	17.2	17.6	16.3	16.7	16.7	17.1	17.5
8H 4H	16.4	16.8	16.8	17.2	17.6	16.3	16.7	16.7	17.1	17.5
6H	16.4	16.7	16.8	17.2	17.6	16.3	16.6	16.7	17.1	17.5
8H	16.3	16.6	16.8	17.1	17.6	16.2	16.5	16.7	17.0	17.5
12H	16.3	16.5	16.8	17.0	17.6	16.2	16.5	16.7	17.0	17.5
12H 4H	16.3	16.7	16.8	17.1	17.6	16.2	16.6	16.7	17.1	17.5
6H	16.3	16.6	16.8	17.1	17.6	16.2	16.5	16.7	17.0	17.5
8H	16.3	16.5	16.8	17.0	17.6	16.2	16.5	16.7	16.9	17.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.7					+ 0.7 / - 0.9				
1.5H	+ 0.3 / - 0.4					+ 0.7 / - 0.6				
2.0H	+ 1.1 / - 1.2					+ 2.0 / - 1.8				

CIE Pub.117, 559.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.0)
 Area: 0.002 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	85	78	74	84	78	74	83	77	74	70
0.80	92	86	82	91	86	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	81
1.25	101	95	92	100	95	91	97	93	90	85
1.50	104	99	95	102	98	94	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	90
2.50	109	104	101	107	103	100	103	100	98	91
3.00	110	107	104	108	105	102	104	102	100	92
4.00	112	109	107	110	108	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

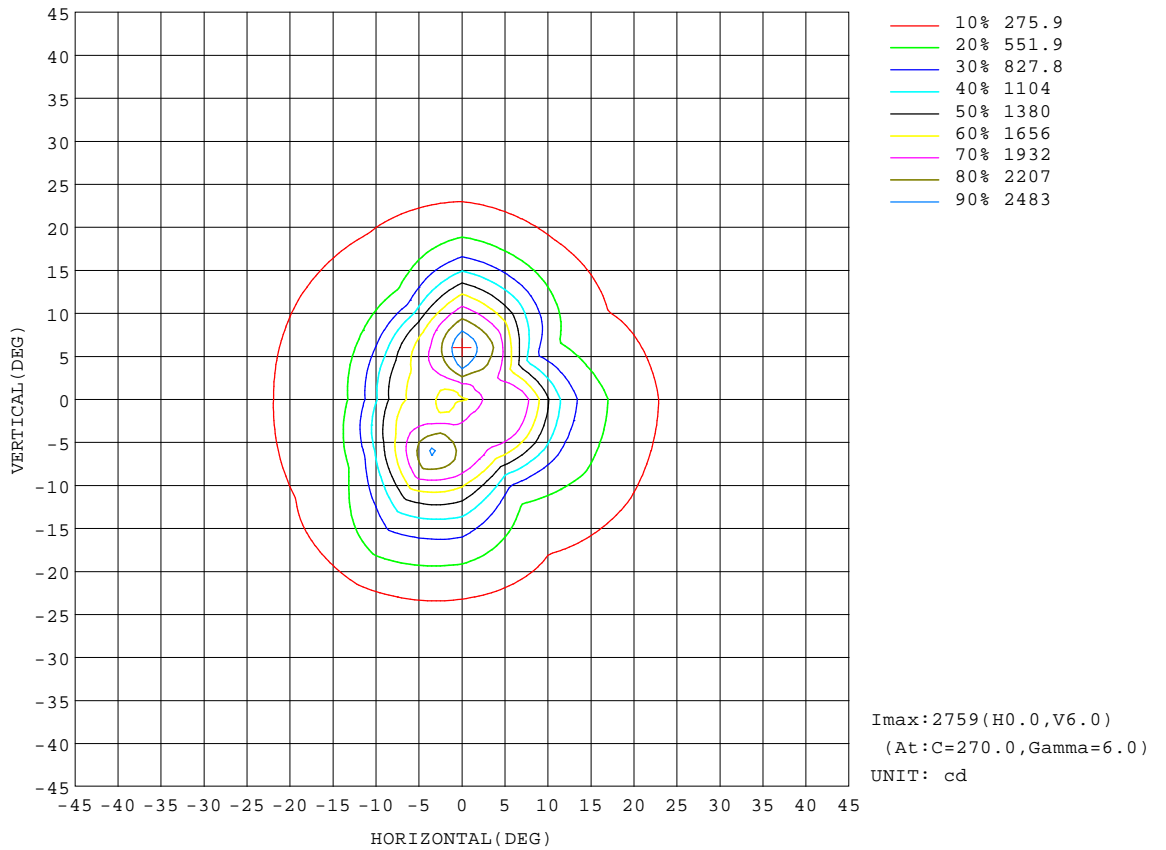


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

Flux out:206.0 lm

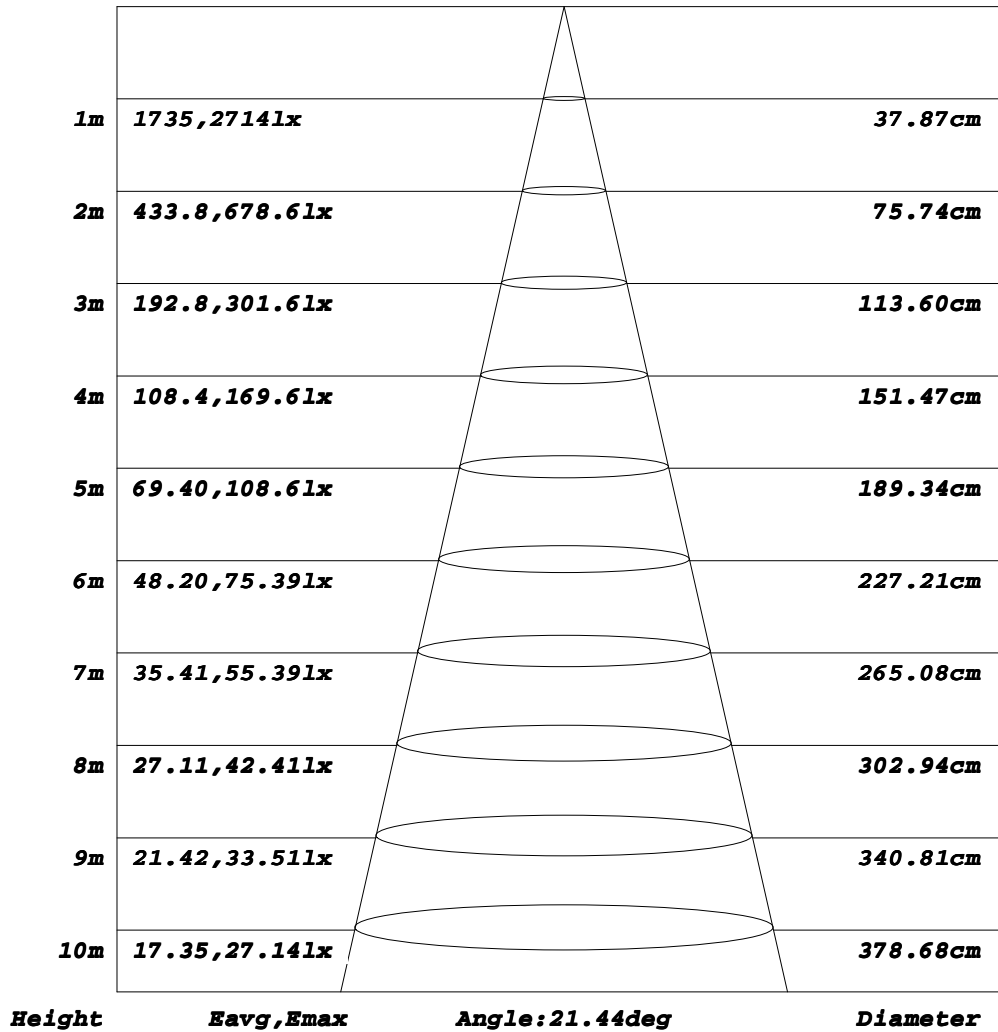


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

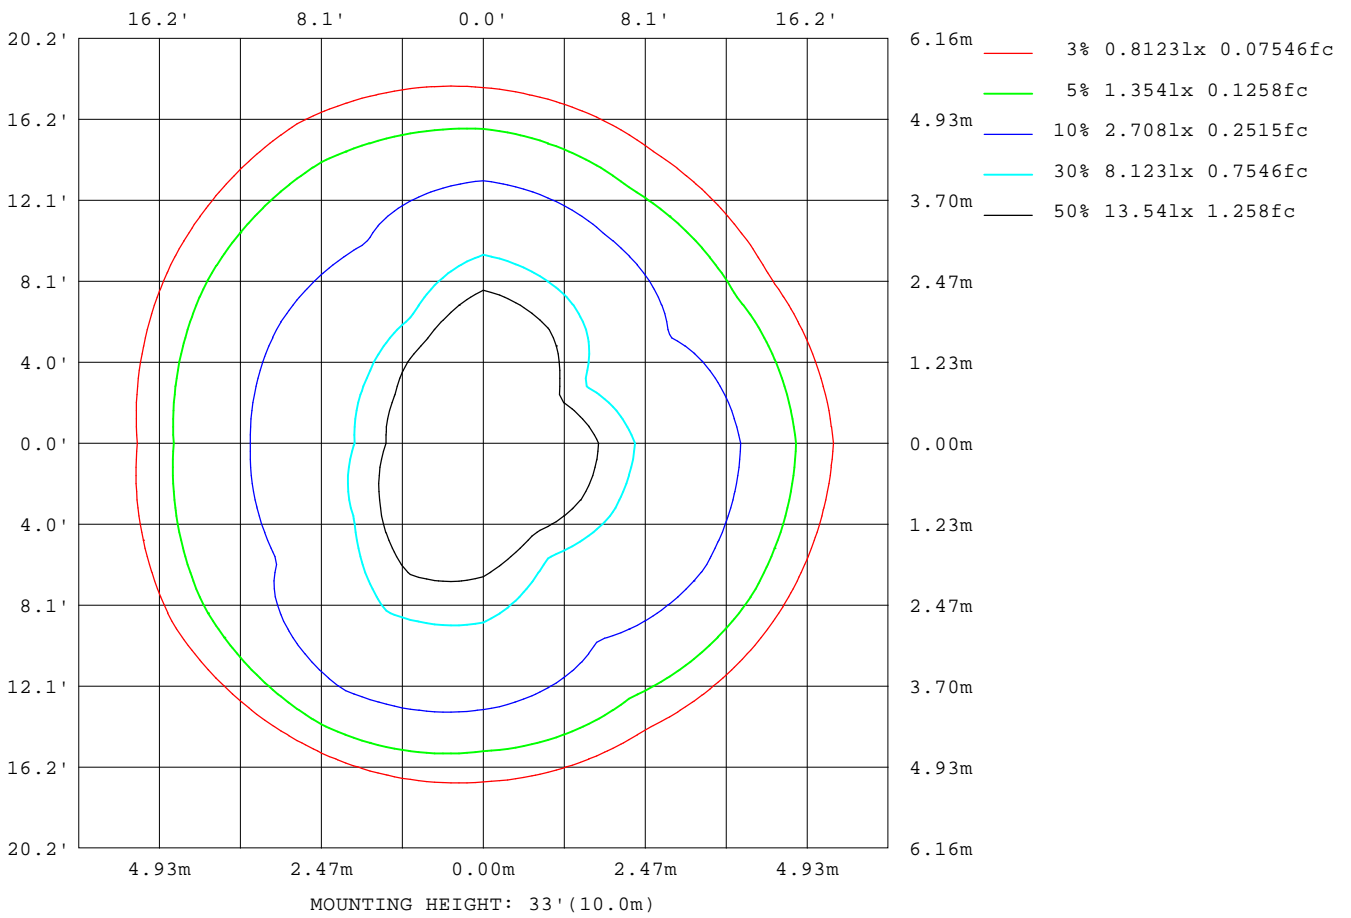

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

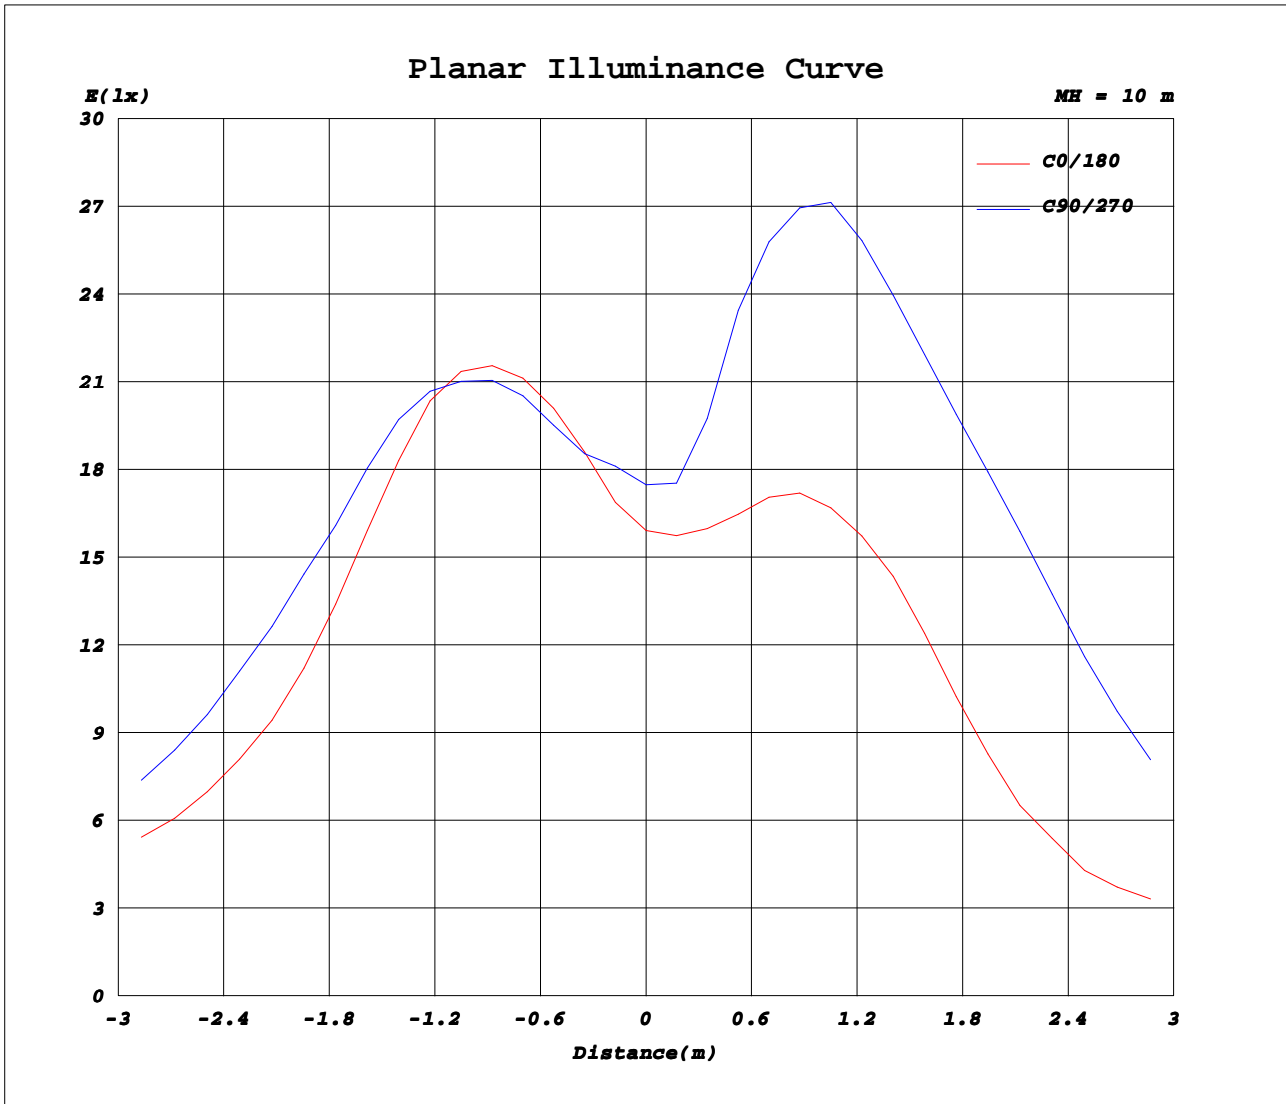

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.4770A P:11.400W PF:0.0000 Freq:0Hz		
Lamp Flux:559.719x1 lm		
Name: UL316-12RW	Type: LED	
MFR.: UNMEI LEDS		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1689	1689	1689	1689	1689	1689	1689	1689	1689	1689	1689	1689							
5	2314	2342	2108	2057	2207	1790	1846	1839	2111	2633	2192	1833							
10	1490	1443	1132	1627	1962	1424	1138	1235	1443	2012	1639	815							
15	716	677	487	902	1062	556	438	486	532	1044	758	408							
20	425	407	295	462	586	311	335	340	313	436	321	260							
25	210	199	154	181	243	210	202	223	216	194	148	149							
30	88.0	75.0	59.4	68.5	80.3	88.4	82.5	104	112	93.8	75.8	66.2							
35	43.1	42.3	36.7	44.1	45.5	41.2	42.2	47.4	48.8	48.1	39.8	34.7							
40	31.0	33.5	28.8	34.4	35.1	30.7	31.2	32.2	29.3	32.2	30.6	27.4							
45	25.2	25.9	24.0	28.5	28.0	25.3	24.1	24.5	22.4	24.9	24.0	22.3							
50	21.0	21.0	19.4	21.5	22.1	21.2	19.9	19.6	18.0	18.7	18.0	17.9							
55	17.2	16.1	14.1	14.6	15.3	15.5	16.2	15.5	14.6	13.8	13.9	12.8							
60	11.2	11.8	9.83	9.92	10.2	10.5	12.9	10.8	9.83	9.88	9.91	8.80							
65	7.28	7.84	6.59	6.89	6.90	7.14	9.58	8.30	6.89	7.03	7.13	5.82							
70	4.47	4.22	4.10	4.19	4.59	4.69	6.17	5.59	4.85	4.65	4.79	3.85							
75	2.23	2.06	1.82	2.13	2.54	2.56	3.56	3.51	3.22	2.91	2.76	2.45							
80	0.91	0.71	0.55	0.76	1.12	1.08	1.98	2.07	2.09	1.69	1.57	1.53							
85	0.23	0.31	0.29	0.31	0.39	0.34	1.49	1.55	1.45	1.34	1.40	1.36							
90	0.26	0.30	0.29	0.26	0.21	0.21	1.44	1.42	1.33	1.27	1.42	1.30							
95	0.43	0.48	0.46	0.44	0.36	0.35	1.42	1.39	1.28	1.27	1.43	1.30							
100	0.61	0.66	0.78	0.72	0.58	0.56	1.43	1.40	1.34	1.32	1.47	1.35							
105	0.97	1.14	1.35	1.14	0.92	0.86	1.48	1.46	1.40	1.40	1.44	1.38							
110	1.56	1.90	1.82	1.49	1.40	1.39	1.62	1.60	1.55	1.57	1.58	1.58							
115	2.34	2.29	1.85	1.81	1.76	1.75	1.93	1.93	1.86	1.82	1.81	1.87							
120	2.55	2.32	2.06	1.96	1.90	2.10	2.37	2.34	2.16	2.08	2.14	2.18							
125	2.29	2.26	2.13	2.05	2.09	2.17	2.78	2.67	2.40	2.41	2.51	2.50							
130	2.41	2.46	2.50	2.44	2.41	2.35	3.07	3.02	2.83	2.87	2.97	2.99							
135	3.01	3.08	3.12	3.08	2.96	2.83	3.66	3.55	3.47	3.46	3.49	3.44							
140	4.03	4.17	4.10	3.92	3.70	3.58	4.65	4.42	4.10	4.11	4.09	4.13							
145	5.18	5.36	5.10	4.81	4.64	4.59	5.76	5.50	5.08	4.97	4.94	5.02							
150	6.25	6.24	5.87	5.73	5.52	5.46	6.65	6.42	6.03	5.86	5.73	5.79							
155	7.00	6.90	6.52	6.48	6.22	6.37	7.38	7.12	6.81	6.57	6.27	6.34							
160	7.24	7.16	6.44	6.57	6.36	6.75	7.84	7.52	7.16	6.83	6.31	6.39							
165	6.85	6.70	5.97	6.00	5.97	6.28	7.43	7.19	6.77	6.45	5.86	5.75							
170	5.81	5.68	5.23	5.29	5.29	5.48	6.27	6.32	5.82	5.46	5.13	5.01							
175	4.79	4.56	4.47	4.32	4.48	4.66	4.85	5.11	4.86	4.60	4.46	4.18							
180	4.36	4.41	4.58	4.32	4.24	4.25	4.44	4.41	4.44	4.31	4.28	4.23							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: