
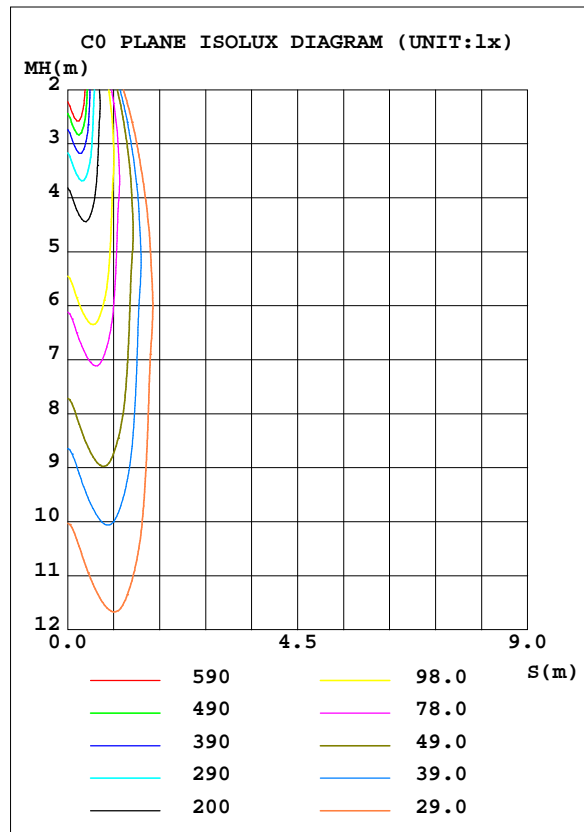


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	4596	S/MH(C0/180)	0.45
NOMINAL POWER(W)	21.3	LOR(%)	100.0	S/MH(C90/270)	0.37
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1003.7	η UP, DN(C0-180)	1.5, 48.8
NOMINAL FLUX(lm)	1003.68	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7, 48.0
LAMPS INSIDE	1	η up(%)	3.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24	η down(%)	96.8	CIBSE SHR MAX	0.30

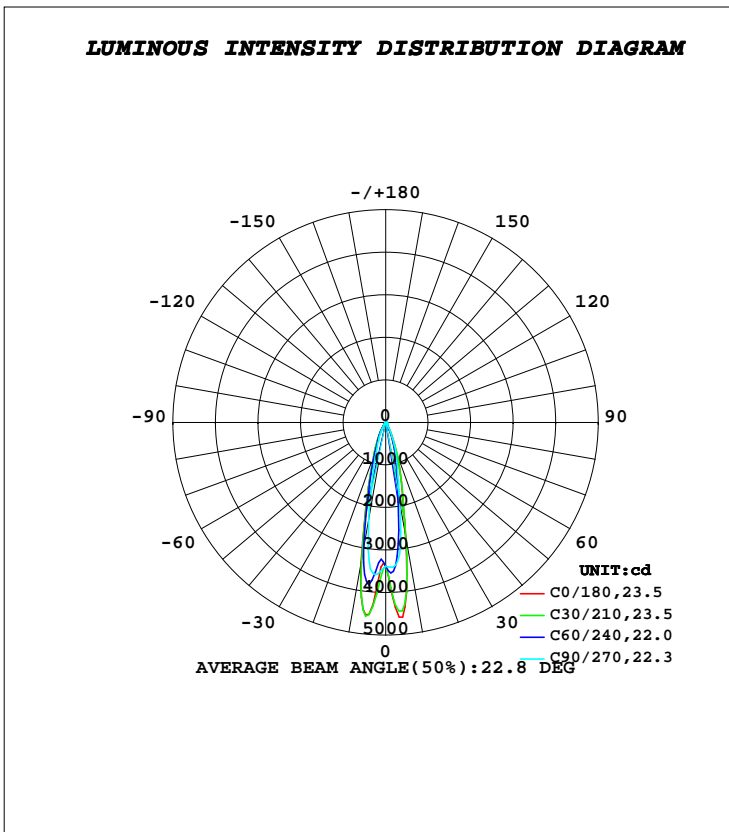

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2705	2140	1946	2929	3337	3121	2318	1642	0- 10	309.1	309.1	30.8,30.8
20	741.2	638.3	660.3	795.3	809.3	784.1	593.4	475.0	10- 20	364.2	673.2	67.1,67.1
30	154.2	127.3	129.2	231.1	257.4	242.8	169.3	103.4	20- 30	168.7	841.9	83.9,83.9
40	61.44	55.81	50.15	55.46	64.09	58.00	50.53	46.87	30- 40	56.55	898.5	89.5,89.5
50	39.65	32.83	31.69	33.75	38.38	35.56	30.64	28.05	40- 50	33.26	931.7	92.8,92.8
60	19.49	17.08	15.58	18.70	21.03	18.95	15.97	13.69	50- 60	22.02	953.8	95,95
70	7.153	6.290	6.329	7.814	9.566	8.492	6.966	5.926	60- 70	11.73	965.5	96.2,96.2
80	1.512	1.313	1.214	1.850	4.110	3.422	2.911	2.886	70- 80	4.611	970.1	96.7,96.7
90	0.7530	0.6515	0.4875	0.4156	2.990	2.559	2.284	2.298	80- 90	1.874	972.0	96.8,96.8
100	1.692	1.441	1.095	0.9628	3.102	2.642	2.329	2.392	90-100	1.834	973.8	97,97
110	3.700	3.129	2.430	2.143	3.456	2.992	2.666	2.924	100-110	2.456	976.3	97.3,97.3
120	4.837	4.010	3.312	3.258	4.630	4.082	3.668	4.000	110-120	3.373	979.6	97.6,97.6
130	5.630	5.003	4.229	3.918	6.236	5.513	4.977	5.423	120-130	3.924	983.6	98,98
140	8.923	8.094	6.855	6.069	8.818	7.660	7.004	7.775	130-140	4.725	988.3	98.5,98.5
150	12.83	11.42	9.955	9.284	12.70	10.99	9.988	10.58	140-150	5.727	994.0	99,99
160	14.26	12.37	11.58	11.36	15.08	13.14	11.94	11.50	150-160	5.453	999.5	99.6,99.6
170	11.25	9.852	9.565	10.22	12.83	11.62	10.06	9.034	160-170	3.316	1003	99.9,99.9
180	9.527	8.874	8.110	8.080	9.632	8.899	8.026	8.115	170-180	0.8997	1004	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

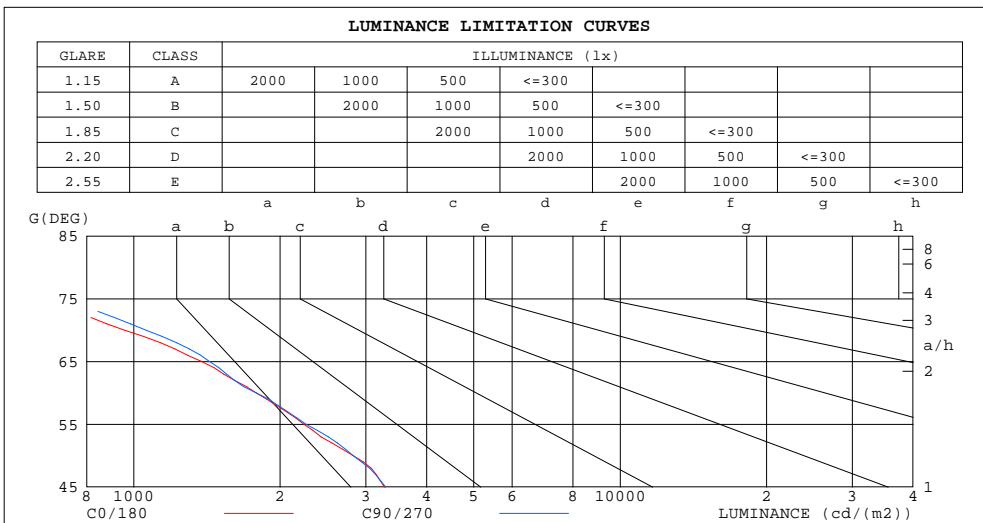

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	447	278
80	399	401
75	621	721
70	959	1062
65	1382	1432
60	1788	1787
55	2241	2264
50	2829	2829
45	3278	3296


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.02	1.01	.00	.99	.97	.96	.95	.94	.92
2.0	1.05	1.01	.98	1.03	.00	.97	.99	.97	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.99	.95	.92	.98	.94	.91	.95	.91	.89	.92	.89	.87	.89	.87	.85	.84
4.0	.94	.90	.86	.93	.89	.86	.91	.87	.84	.88	.85	.83	.86	.84	.82	.80
5.0	.90	.85	.82	.89	.85	.81	.87	.83	.80	.85	.82	.79	.83	.81	.78	.77
6.0	.86	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.81	.78	.76	.74
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.79	.76	.73	.78	.75	.73	.72
8.0	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.73	.71	.76	.73	.70	.69
9.0	.77	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.70	.68	.67
10.0	.75	.70	.67	.74	.70	.67	.73	.69	.67	.72	.69	.66	.72	.68	.66	.65

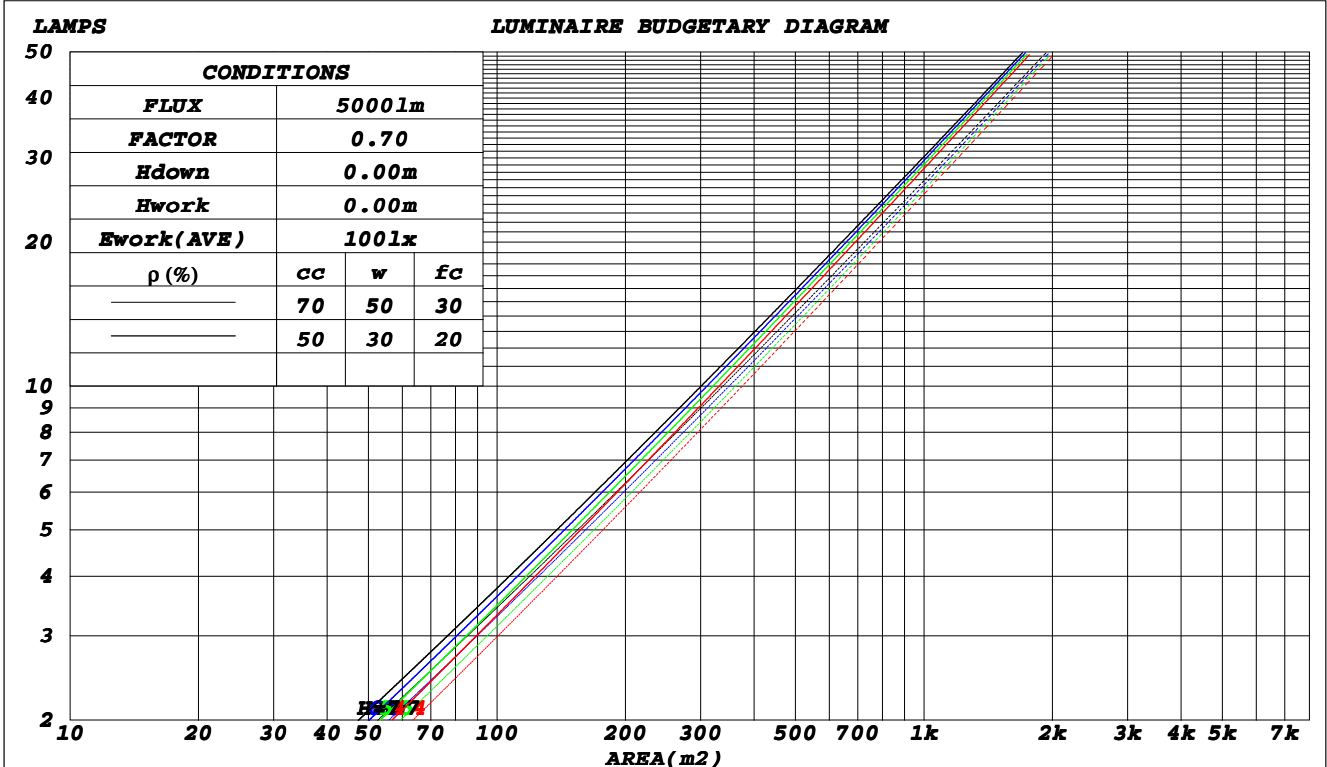

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.159	.090	.029	.151	.086	.027	.137	.078	.025	.123	.071	.023	.111	.065	.021	
2.0	.148	.081	.025	.142	.078	.024	.129	.072	.022	.118	.066	.021	.108	.061	.019	
3.0	.138	.074	.022	.133	.071	.021	.122	.066	.020	.113	.062	.019	.104	.058	.018	
4.0	.129	.067	.020	.125	.065	.019	.116	.061	.018	.108	.058	.017	.100	.054	.017	
5.0	.122	.062	.018	.118	.060	.018	.110	.057	.017	.103	.054	.016	.096	.051	.015	
6.0	.115	.058	.016	.111	.056	.016	.104	.053	.016	.098	.051	.015	.092	.048	.014	
7.0	.109	.054	.015	.105	.053	.015	.099	.050	.014	.094	.048	.014	.088	.046	.014	
8.0	.103	.050	.014	.100	.049	.014	.095	.047	.014	.090	.046	.013	.085	.044	.013	
9.0	.098	.047	.013	.096	.047	.013	.091	.045	.013	.086	.043	.012	.082	.042	.012	
10.0	.094	.045	.012	.091	.044	.012	.087	.043	.012	.083	.041	.012	.079	.040	.011	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.194	.182	.171	.166	.156	.147	.114	.107	.102	.065	.062	.059	.021	.020	.019	
2.0	.177	.157	.140	.152	.135	.121	.104	.094	.084	.060	.054	.049	.019	.018	.016	
3.0	.164	.138	.118	.140	.119	.102	.096	.083	.071	.056	.048	.042	.018	.016	.014	
4.0	.152	.123	.101	.130	.106	.088	.090	.074	.062	.052	.043	.036	.017	.014	.012	
5.0	.142	.111	.088	.122	.096	.077	.084	.067	.054	.049	.039	.032	.016	.013	.011	
6.0	.134	.101	.078	.115	.088	.068	.079	.061	.048	.046	.036	.029	.015	.012	.009	
7.0	.126	.093	.070	.109	.081	.061	.075	.057	.043	.044	.033	.026	.014	.011	.009	
8.0	.120	.087	.064	.103	.075	.056	.071	.053	.040	.042	.031	.024	.013	.010	.008	
9.0	.114	.081	.059	.098	.071	.052	.068	.050	.037	.040	.029	.022	.013	.010	.007	
10.0	.109	.077	.055	.094	.067	.048	.065	.047	.034	.038	.028	.020	.012	.009	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.3	10.1	9.6	10.3	10.5	8.9	9.7	9.2	9.9	10.1
3H	9.7	10.4	10.0	10.7	10.9	9.4	10.0	9.7	10.3	10.5
4H	9.8	10.4	10.1	10.7	11.0	9.4	10.1	9.7	10.3	10.6
6H	9.7	10.4	10.1	10.7	11.0	9.4	10.0	9.7	10.3	10.6
8H	9.7	10.3	10.1	10.6	10.9	9.4	10.0	9.7	10.3	10.6
12H	9.7	10.3	10.0	10.6	10.9	9.3	9.9	9.7	10.2	10.5
4H 2H	9.5	10.2	9.8	10.4	10.7	9.2	9.8	9.5	10.1	10.3
3H	10.0	10.6	10.4	10.9	11.2	9.6	10.2	10.0	10.5	10.9
4H	10.1	10.6	10.5	11.0	11.3	9.7	10.2	10.1	10.6	10.9
6H	10.1	10.6	10.5	10.9	11.3	9.7	10.2	10.1	10.5	10.9
8H	10.1	10.5	10.5	10.9	11.3	9.7	10.1	10.1	10.5	10.9
12H	10.0	10.4	10.5	10.8	11.3	9.6	10.0	10.1	10.4	10.9
8H 4H	10.0	10.5	10.5	10.9	11.3	9.7	10.1	10.1	10.5	10.9
6H	10.0	10.4	10.5	10.8	11.3	9.6	10.0	10.1	10.4	10.9
8H	10.0	10.3	10.5	10.8	11.3	9.6	9.9	10.1	10.4	10.9
12H	10.0	10.3	10.5	10.8	11.3	9.6	9.8	10.1	10.3	10.9
12H 4H	10.0	10.4	10.4	10.8	11.2	9.6	10.0	10.1	10.4	10.9
6H	10.0	10.3	10.5	10.8	11.3	9.6	9.9	10.1	10.4	10.9
8H	10.0	10.3	10.5	10.7	11.3	9.6	9.8	10.1	10.3	10.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.8 / - 0.9					+ 0.7 / - 0.9				
1.5H	+ 0.4 / - 0.5					+ 0.4 / - 0.8				
2.0H	+ 1.5 / - 1.3					+ 1.7 / - 1.8				

CIE Pub.117, 1004 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.0)
 Area: 0.0188 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	85	78	75	84	78	74	83	78	74	70
0.80	92	86	82	92	86	82	90	85	82	78
1.00	97	91	87	96	91	87	94	90	86	82
1.25	101	96	92	100	95	91	98	93	90	86
1.50	104	99	95	102	98	95	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	90
2.50	109	105	101	107	103	100	103	100	98	91
3.00	110	107	104	108	105	102	104	102	100	93
4.00	113	110	107	110	108	106	106	104	102	94
5.00	114	111	109	111	109	108	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

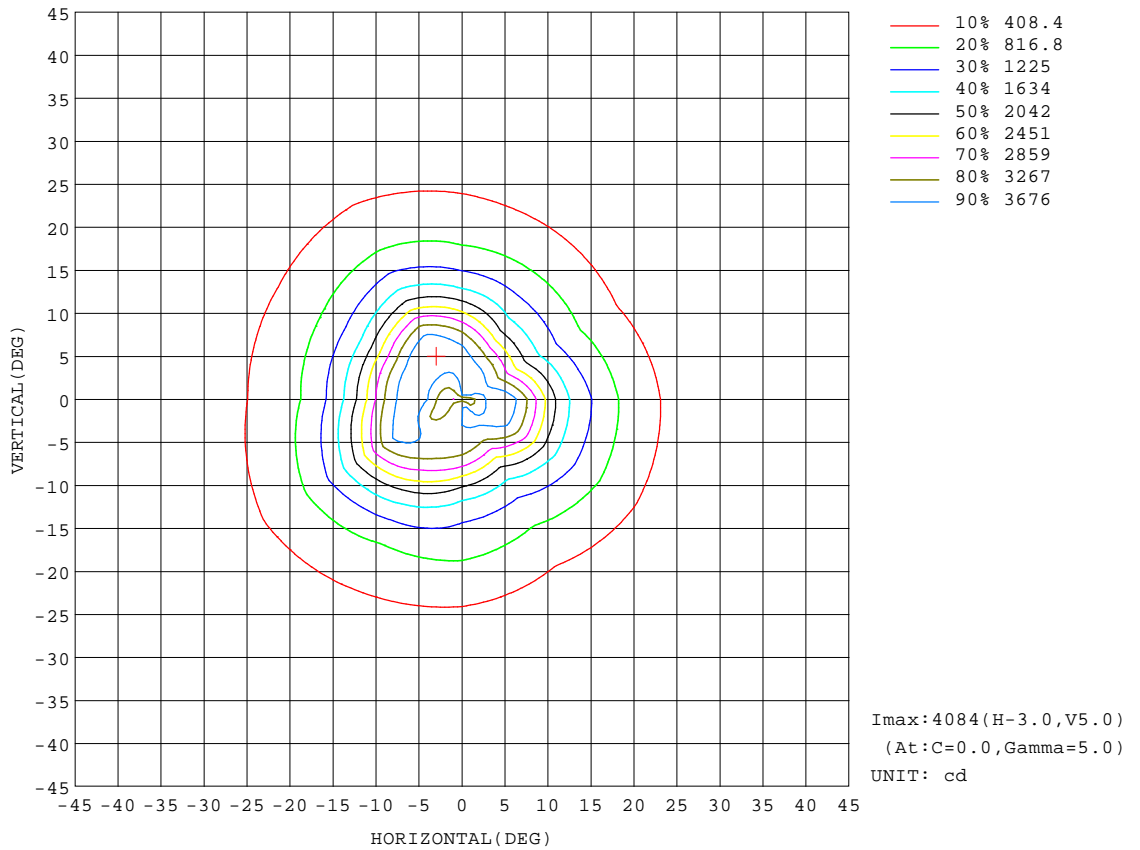


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

Flux out:399.8 lm

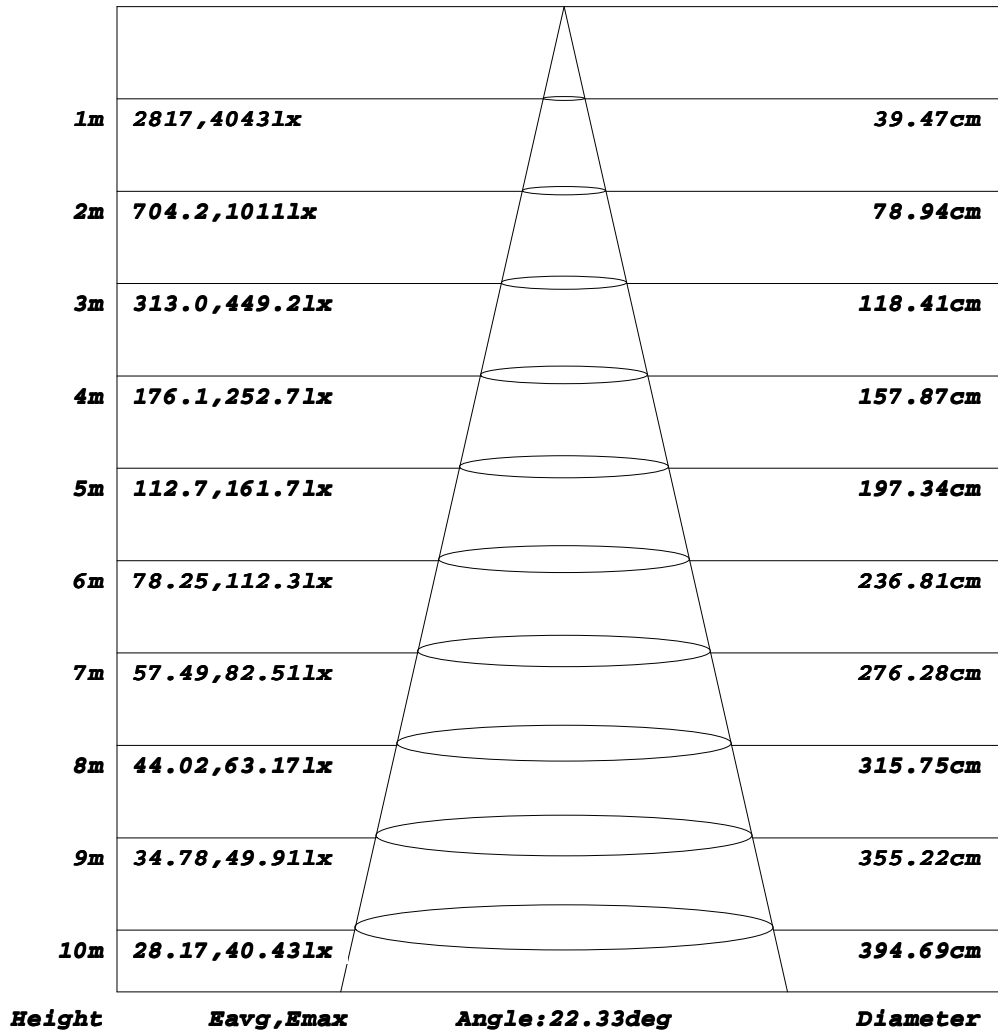


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

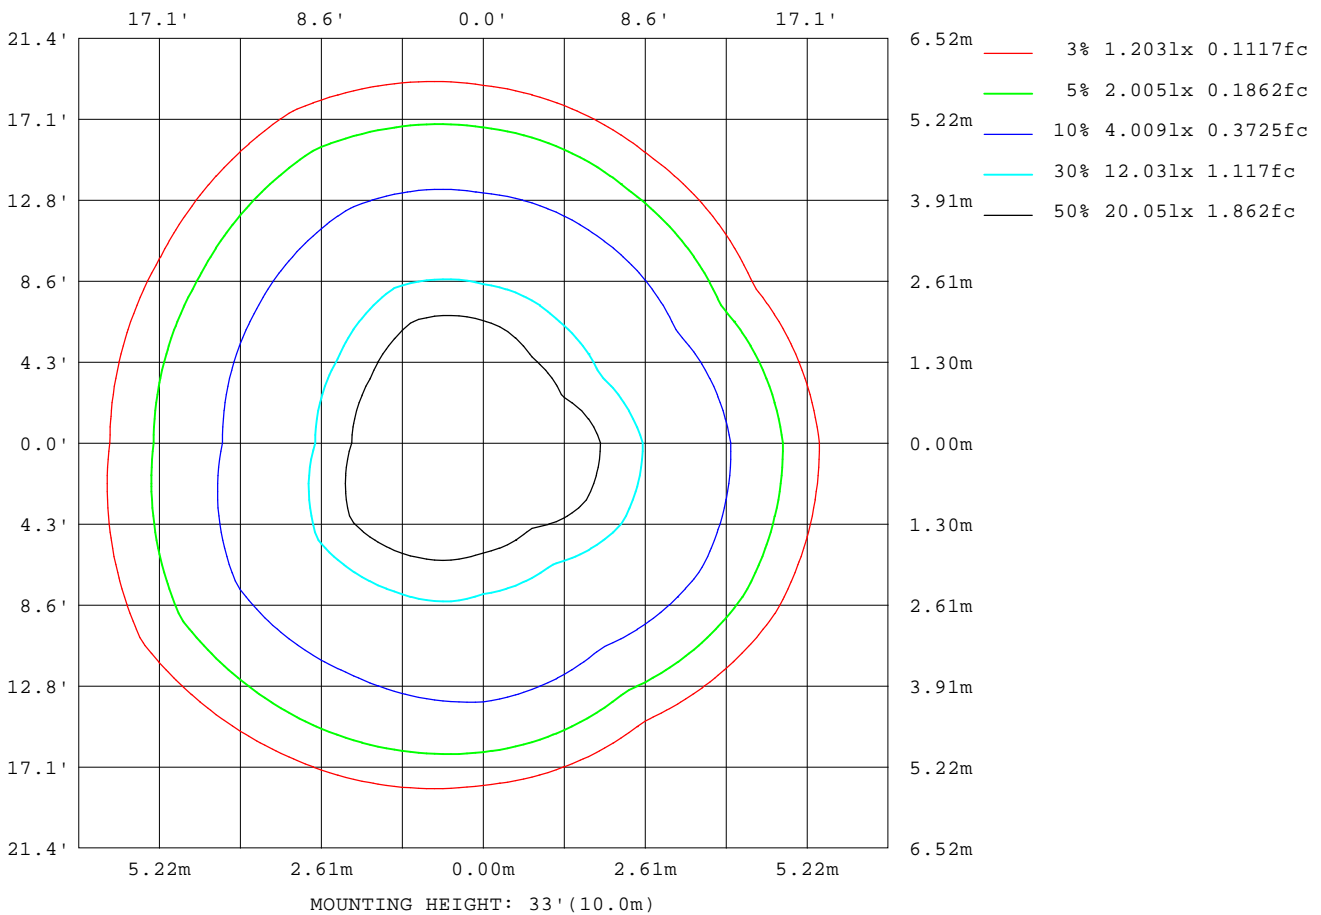

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

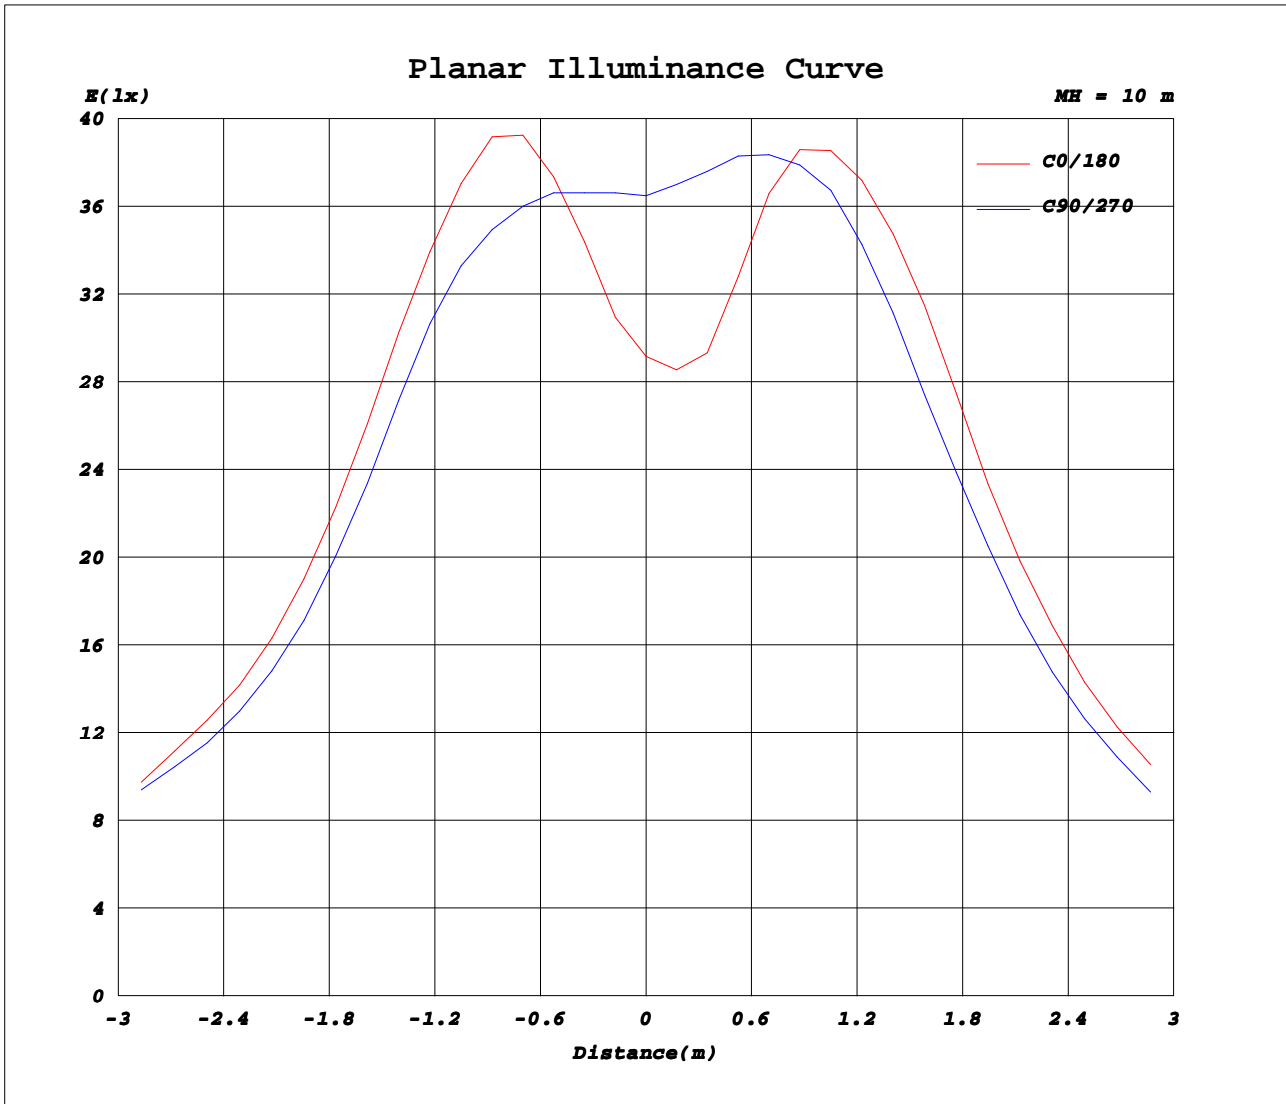

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.8910A P:21.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1003.68x1 lm		
Name: UL316-24RW	Type: LED	
MFR.: UNMEI LEDS		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3383	3383	3383	3383	3383	3383	3383	3383	3383	3383	3383	3383							
5	4596	4447	3149	3276	3310	3269	4527	4532	3722	3554	3246	3040							
10	2705	2741	1656	1946	2543	3319	3337	3278	2996	2318	1695	1589							
15	1437	1441	919	1075	1343	1752	1579	1583	1460	1120	969	861							
20	741	792	515	660	698	894	809	851	730	593	510	440							
25	359	373	239	328	392	478	469	467	410	335	257	211							
30	154	160	101	129	197	265	257	257	232	169	119	87.3							
35	78.0	80.7	59.6	63.4	77.6	120	108	95.6	94.7	68.0	61.4	58.7							
40	61.4	65.7	47.9	50.1	51.8	59.1	64.1	64.3	52.9	50.5	47.2	46.6							
45	50.5	51.9	37.8	40.6	40.9	45.3	50.1	48.2	40.7	39.1	38.4	37.5							
50	39.6	39.8	27.2	31.7	32.9	34.6	38.4	38.7	33.1	30.6	28.3	27.9							
55	28.0	29.4	19.9	22.6	24.5	26.3	28.3	29.2	24.3	24.0	20.0	19.2							
60	19.5	20.4	14.4	15.6	18.1	19.3	21.0	20.5	17.7	16.0	14.6	12.8							
65	12.7	13.6	9.33	10.5	12.3	12.9	15.1	13.7	12.7	10.9	9.73	8.72							
70	7.15	7.95	4.96	6.33	7.24	8.40	9.57	8.81	8.24	6.97	6.05	5.80							
75	3.51	4.41	2.30	3.25	3.67	4.50	5.87	5.61	4.93	4.42	3.85	4.13							
80	1.51	1.86	0.87	1.21	1.43	2.27	4.11	3.85	3.08	2.91	2.81	2.96							
85	0.85	0.81	0.47	0.42	0.43	0.81	3.28	3.10	2.35	2.35	2.38	2.42							
90	0.75	0.72	0.59	0.49	0.44	0.40	2.99	2.90	2.28	2.28	2.30	2.30							
95	1.14	1.07	0.89	0.73	0.67	0.60	3.01	2.94	2.31	2.27	2.32	2.33							
100	1.69	1.60	1.31	1.10	0.99	0.93	3.10	3.03	2.33	2.33	2.39	2.39							
105	2.59	2.49	2.02	1.66	1.48	1.41	3.20	3.18	2.42	2.42	2.51	2.58							
110	3.70	3.59	2.76	2.43	2.19	2.10	3.46	3.47	2.61	2.67	2.86	2.99							
115	4.37	4.28	3.29	2.99	2.85	2.81	3.96	3.99	3.00	3.15	3.35	3.53							
120	4.84	4.66	3.49	3.31	3.24	3.27	4.63	4.71	3.58	3.67	3.91	4.09							
125	4.98	4.80	3.81	3.56	3.47	3.57	5.37	5.45	4.16	4.30	4.53	4.73							
130	5.63	5.52	4.58	4.23	3.97	3.87	6.24	6.39	4.80	4.98	5.29	5.56							
135	6.96	6.88	5.82	5.34	4.91	4.64	7.38	7.43	5.65	5.85	6.25	6.63							
140	8.92	8.84	7.49	6.86	6.26	5.87	8.82	8.88	6.68	7.00	7.53	8.02							
145	11.07	10.91	9.04	8.52	7.93	7.52	10.83	10.79	8.16	8.52	9.10	9.47							
150	12.8	12.7	10.4	9.96	9.43	9.13	12.7	12.6	9.67	9.99	10.5	10.7							
155	14.2	13.9	11.3	11.2	10.7	10.5	14.3	14.1	11.0	11.2	11.6	11.4							
160	14.3	13.8	11.2	11.6	11.3	11.4	15.1	14.7	11.9	11.9	11.8	11.2							
165	13.0	12.6	10.1	10.8	11.1	11.2	14.5	14.0	11.7	11.6	10.9	10.0							
170	11.25	11.20	8.77	9.57	9.99	10.5	12.8	12.9	10.6	10.1	9.29	8.78							
175	9.57	9.70	7.73	8.10	8.67	9.26	10.62	10.91	9.14	8.55	8.22	7.67							
180	9.53	9.81	8.12	8.11	8.10	8.06	9.63	9.80	8.18	8.03	8.12	8.11							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: