


# UL316-36-120V



**36W (12 X 3W) RGB - NO DMX - 120V**  
**27W (9 X 3W) RGB - NO DMX - 120V**  
**CREE WHITE - 2700K TO 6000K**  
**CAST 316L SS**  
**REPLACEABLE LEDS**  
**UL CERTIFIED FOR SWIMMING POOLS**

Cast 316L Stainless Steel - Replaceable LEDs  
 Removable Yoke, optional Tripod  
 Submersible Installation only  
 Flush Mount Face Ring  
 SS Niche optional

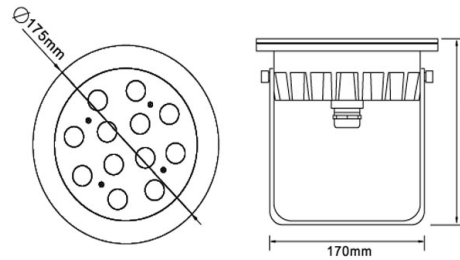

Specification	Description
Input voltage	120V RGB - NO DMX (auto internal program)
Output power	36 watts (12X3W), optional 27 watts (9X3W)
Rendering Index	>70rA (warm white)
Beam angle	10° 25, 45, 60, 90 - Bead lens 15, 30, 60, 90
LEDs	<b>Replaceable</b> - Internal Driver
Material	<b>Cast 316L Stainless Steel</b> Silicone gasket - tempered glass lens
Face ring	316L SS Flush Mount
White - no DMX	CREE-XPE - 3000K, 4000K, 6000K
LEDs operating life	> 50,000 hours
IP rating	<b>IP68 - Certified Submersible</b>
Cable	9 FEET - SOW 18/3
Dimensions	Diameter 7 1/2"x 7 1/2"H with yoke
Certifications	cULus - CSA22.2 no.89 - including swimming pools and splash pads - meets 680 standards
Installation	Submersible Installation only - optional SS niche

