
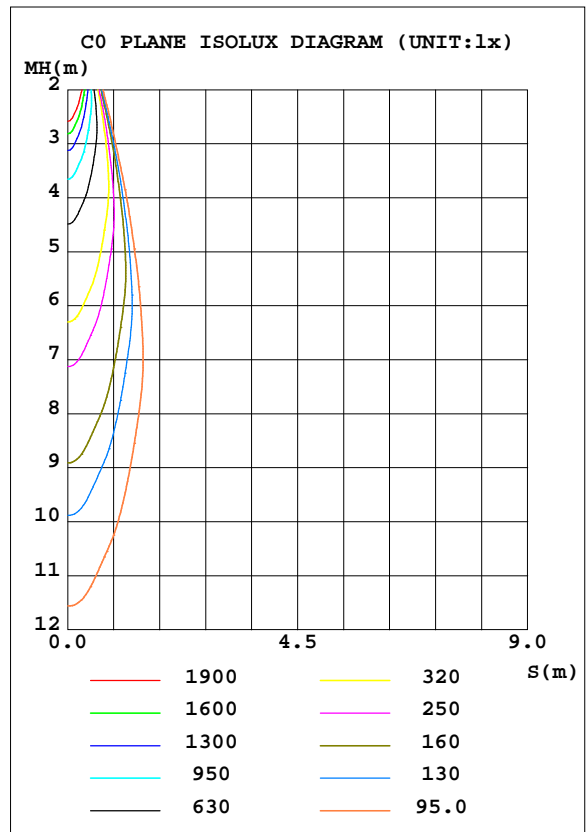


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.4lx1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	12694	S/MH(C0/180)	0.33
NOMINAL POWER(W)	23.3	LOR(%)	100.0	S/MH(C90/270)	0.32
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1673.4	η UP, DN(C0-180)	1.4,46.5
NOMINAL FLUX(lm)	1673.41	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7,50.4
LAMPS INSIDE	1	η up(%)	3.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24	η down(%)	96.8	CIBSE SHR MAX	0.30

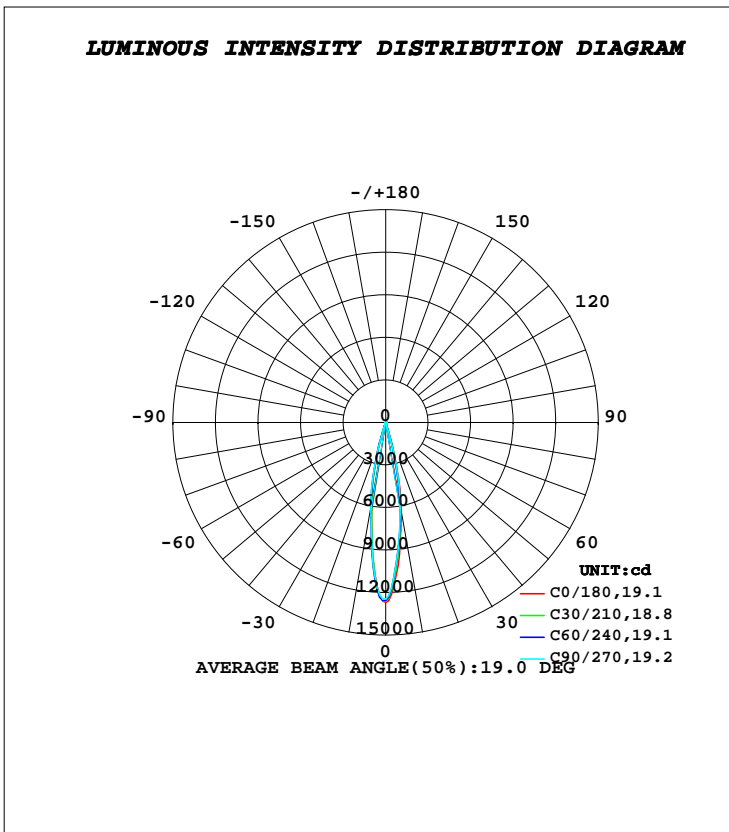

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	627.3	598.1	594.9	550.6	586.3	588.0	606.8	597.1	0- 10	799.4	799.4	47.8,47.8
20	26.44	23.12	22.68	29.15	34.95	39.65	40.40	34.91	10- 20	661.6	1461	87.3,87.3
30	9.310	9.293	9.806	10.50	11.29	10.83	10.94	11.56	20- 30	62.20	1523	91,91
40	3.547	3.537	3.577	3.664	3.640	3.575	3.805	4.151	30- 40	38.92	1562	93.4,93.4
50	3.347	3.239	3.340	3.245	3.300	3.340	3.397	3.398	40- 50	27.87	1590	95,95
60	0.8791	0.8503	0.8572	0.9999	0.9638	1.008	1.001	1.058	50- 60	17.52	1608	96.1,96.1
70	0.2782	0.2751	0.2735	0.3372	0.4514	0.4556	0.4602	0.5189	60- 70	5.776	1613	96.4,96.4
80	0.1300	0.1274	0.1273	0.1489	0.5085	0.5038	0.5063	0.5268	70- 80	3.703	1617	96.6,96.6
90	0.0887	0.0875	0.0873	0.0865	0.4759	0.4739	0.4736	0.4716	80- 90	3.289	1620	96.8,96.8
100	0.1978	0.2001	0.1948	0.1853	0.4206	0.4191	0.4188	0.4179	90-100	3.090	1623	97,97
110	0.5394	0.5431	0.5327	0.5121	0.4643	0.4541	0.4545	0.4565	100-110	4.096	1627	97.3,97.3
120	0.6583	0.6458	0.6290	0.6178	0.7022	0.6913	0.6846	0.6833	110-120	5.909	1633	97.6,97.6
130	0.5601	0.5631	0.5634	0.5649	0.8952	0.8818	0.8803	0.8813	120-130	6.136	1640	98,98
140	1.058	1.084	1.095	1.077	1.298	1.270	1.263	1.258	130-140	6.965	1647	98.4,98.4
150	1.847	1.861	1.875	1.835	1.990	1.953	1.941	1.928	140-150	9.548	1656	99,99
160	2.290	2.232	2.347	2.281	2.517	2.450	2.496	2.341	150-160	10.05	1666	99.6,99.6
170	1.522	1.506	1.619	1.634	1.737	1.775	1.808	1.643	160-170	6.052	1672	99.9,99.9
180	0.8913	0.9254	0.9200	0.9405	0.8961	0.9289	0.9263	0.9414	170-180	1.255	1673	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

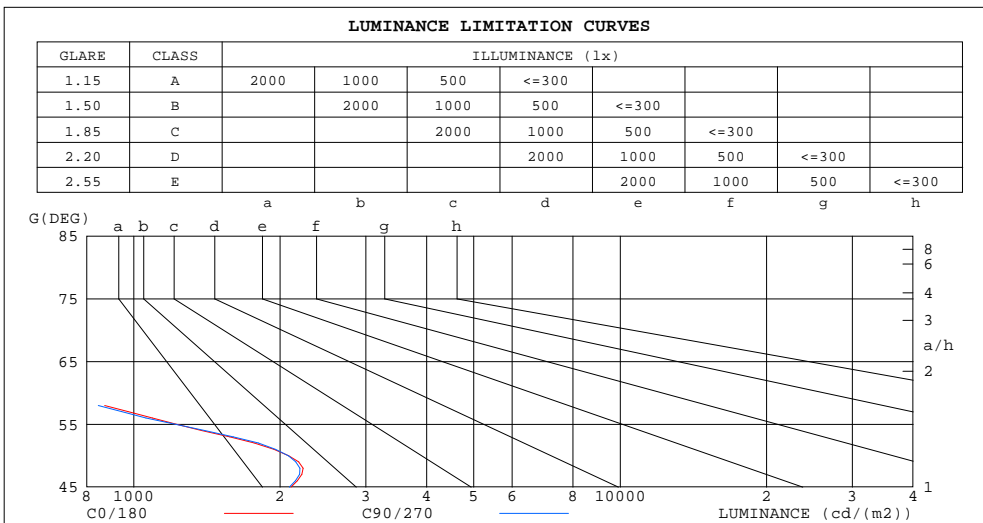


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.4lx1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	.99	.97	.97	.96	.94
2.0	1.07	1.04	1.02	1.05	1.03	1.01	1.02	.99	.98	.98	.97	.95	.95	.94	.93	.91
3.0	1.03	.99	.97	1.02	.98	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.89
4.0	.99	.96	.93	.98	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.87
5.0	.96	.92	.90	.95	.92	.89	.93	.90	.88	.92	.89	.87	.90	.88	.86	.85
6.0	.94	.90	.87	.93	.89	.87	.91	.88	.86	.90	.87	.85	.88	.86	.84	.83
7.0	.91	.87	.85	.90	.87	.84	.89	.86	.84	.88	.85	.83	.87	.84	.82	.81
8.0	.89	.85	.83	.88	.85	.82	.87	.84	.82	.86	.83	.81	.85	.83	.81	.80
9.0	.87	.83	.81	.86	.83	.80	.85	.82	.80	.84	.82	.80	.84	.81	.79	.78
10.0	.85	.81	.79	.85	.81	.79	.84	.81	.79	.83	.80	.78	.82	.80	.78	.77

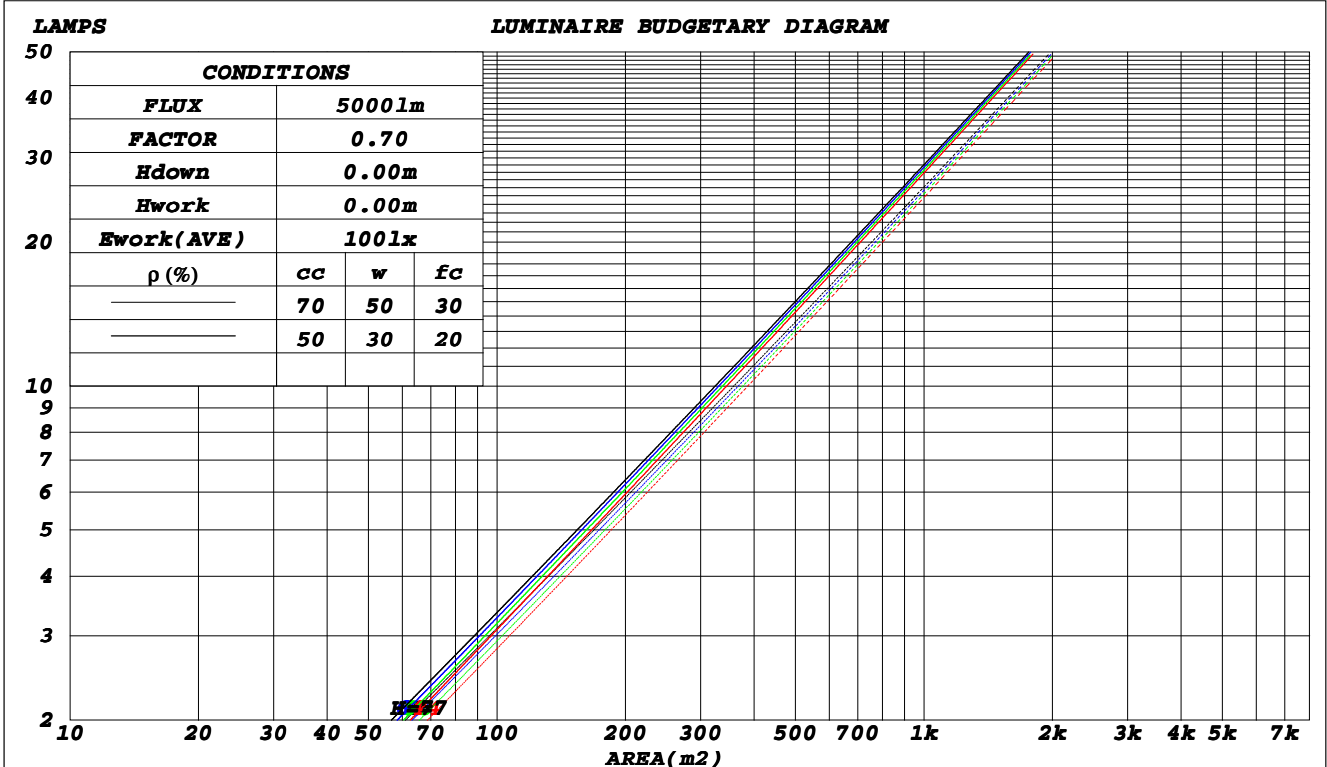

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.135	.077	.024	.127	.072	.023	.113	.065	.021	.100	.058	.018	.088	.051	.016	
2.0	.123	.067	.021	.117	.064	.020	.105	.058	.018	.094	.053	.016	.084	.047	.015	
3.0	.113	.060	.018	.108	.058	.017	.098	.053	.016	.089	.049	.015	.080	.044	.014	
4.0	.105	.055	.016	.100	.053	.016	.092	.049	.015	.084	.045	.014	.077	.042	.013	
5.0	.098	.050	.014	.094	.048	.014	.087	.045	.013	.080	.042	.013	.073	.039	.012	
6.0	.092	.046	.013	.088	.045	.013	.082	.042	.012	.076	.039	.012	.070	.037	.011	
7.0	.086	.043	.012	.083	.042	.012	.078	.039	.011	.072	.037	.011	.068	.035	.010	
8.0	.082	.040	.011	.079	.039	.011	.074	.037	.011	.069	.035	.010	.065	.033	.010	
9.0	.077	.037	.010	.075	.037	.010	.071	.035	.010	.066	.033	.010	.063	.032	.009	
10.0	.074	.035	.010	.072	.035	.010	.068	.033	.009	.064	.032	.009	.060	.030	.009	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.193	.182	.173	.165	.156	.149	.113	.108	.103	.065	.062	.060	.021	.020	.019	
2.0	.174	.157	.143	.149	.135	.124	.102	.094	.086	.059	.054	.051	.019	.018	.016	
3.0	.159	.138	.121	.136	.119	.105	.094	.083	.074	.054	.048	.043	.017	.016	.014	
4.0	.146	.123	.105	.125	.106	.091	.086	.074	.064	.050	.043	.038	.016	.014	.012	
5.0	.135	.110	.092	.116	.095	.080	.080	.067	.056	.046	.039	.033	.015	.013	.011	
6.0	.126	.100	.082	.108	.087	.071	.075	.061	.050	.043	.036	.030	.014	.012	.010	
7.0	.118	.092	.074	.101	.080	.064	.070	.056	.045	.041	.033	.027	.013	.011	.009	
8.0	.111	.085	.067	.096	.074	.058	.066	.052	.041	.039	.031	.025	.012	.010	.008	
9.0	.105	.079	.062	.091	.069	.054	.063	.048	.038	.037	.029	.023	.012	.009	.008	
10.0	.100	.074	.057	.086	.065	.050	.060	.045	.036	.035	.027	.021	.011	.009	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.6	5.2	4.9	5.4	5.6	4.5	5.1	4.7	5.3	5.5
3H	4.7	5.2	4.9	5.4	5.7	4.5	5.1	4.8	5.3	5.5
4H	4.6	5.2	5.0	5.4	5.7	4.5	5.0	4.8	5.3	5.6
6H	4.6	5.1	5.0	5.4	5.7	4.5	5.0	4.8	5.3	5.6
8H	4.6	5.1	5.0	5.4	5.7	4.5	5.0	4.8	5.3	5.6
12H	4.6	5.1	5.0	5.4	5.7	4.5	5.0	4.9	5.3	5.6
4H 2H	4.6	5.1	4.9	5.4	5.6	4.5	5.0	4.8	5.3	5.5
3H	4.7	5.1	5.0	5.4	5.8	4.5	5.0	4.9	5.3	5.6
4H	4.7	5.1	5.1	5.4	5.8	4.6	5.0	4.9	5.3	5.7
6H	4.7	5.1	5.1	5.5	5.9	4.6	5.0	5.0	5.3	5.7
8H	4.7	5.1	5.2	5.5	5.9	4.6	4.9	5.0	5.3	5.8
12H	4.7	5.1	5.2	5.5	5.9	4.6	5.0	5.1	5.4	5.8
8H 4H	4.6	4.9	5.0	5.3	5.8	4.5	4.8	4.9	5.2	5.6
6H	4.6	4.9	5.1	5.4	5.9	4.5	4.8	5.0	5.3	5.7
8H	4.7	5.0	5.2	5.4	5.9	4.6	4.8	5.1	5.3	5.8
12H	4.8	5.0	5.3	5.5	6.0	4.7	4.9	5.2	5.4	5.9
12H 4H	4.5	4.9	5.0	5.3	5.7	4.4	4.7	4.9	5.2	5.6
6H	4.6	4.9	5.1	5.3	5.8	4.5	4.7	5.0	5.2	5.7
8H	4.7	4.9	5.2	5.4	5.9	4.6	4.8	5.1	5.3	5.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.9 / - 1.3					+ 1.0 / - 1.3				
1.5H	+ 1.0 / - 1.6					+ 1.0 / - 1.5				
2.0H	+ 2.6 / - 4.1					+ 2.7 / - 4.2				

CIE Pub.117, 1673 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.8)
 Area: 0.025 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	81	78	87	81	77	86	81	77	74
0.80	95	89	85	94	88	85	92	88	85	81
1.00	99	93	90	98	93	89	96	92	89	84
1.25	103	97	94	101	97	94	99	95	92	88
1.50	105	101	97	104	100	97	101	98	95	90
2.00	108	104	100	106	102	99	103	100	98	92
2.50	109	106	103	108	104	102	104	101	99	93
3.00	111	108	105	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	95
5.00	114	112	110	112	110	108	107	106	105	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

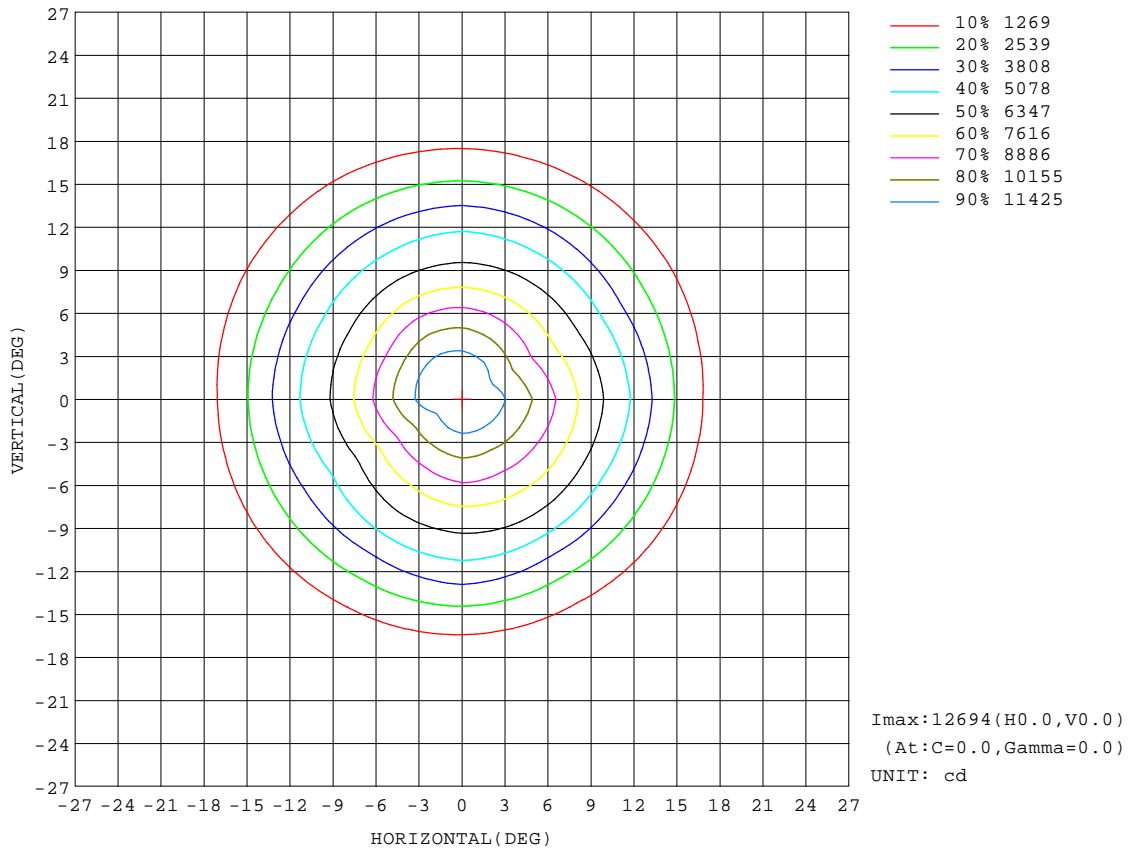


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.4lx1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

Flux out:799.4 lm

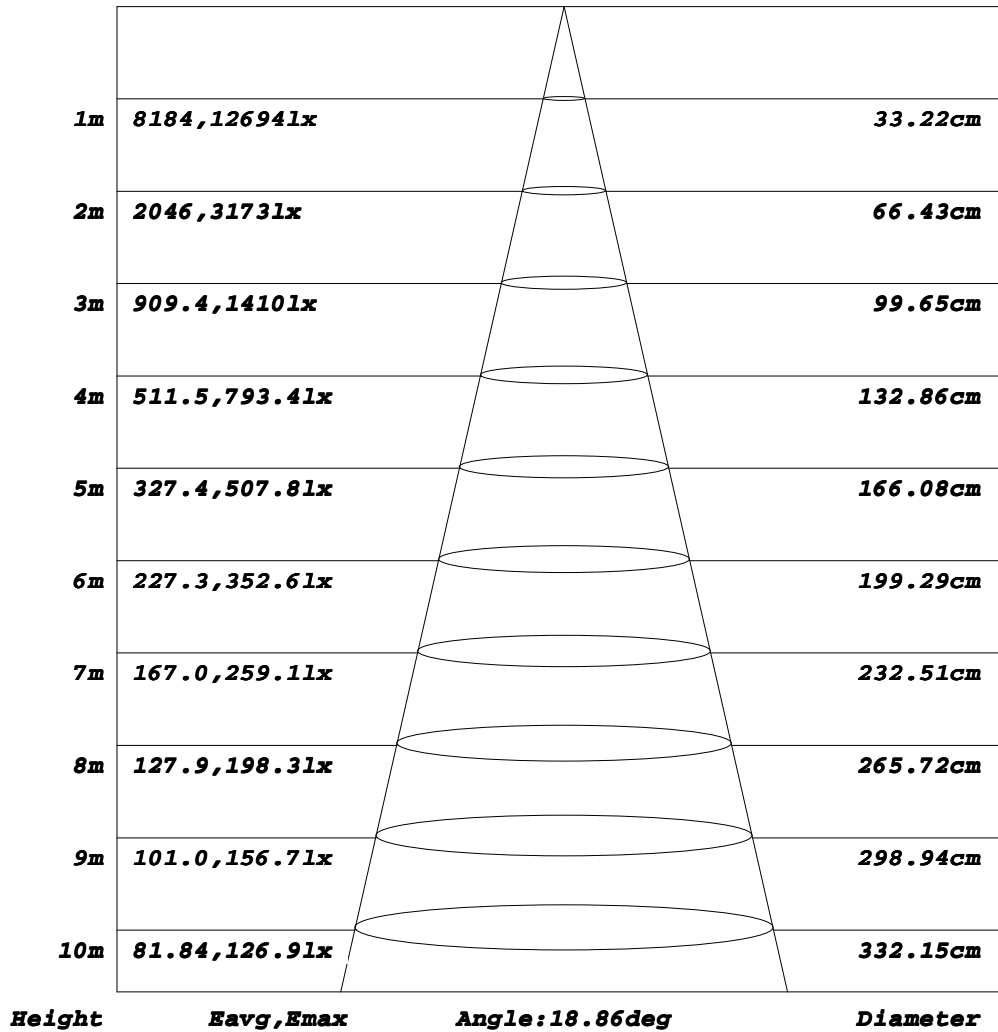


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

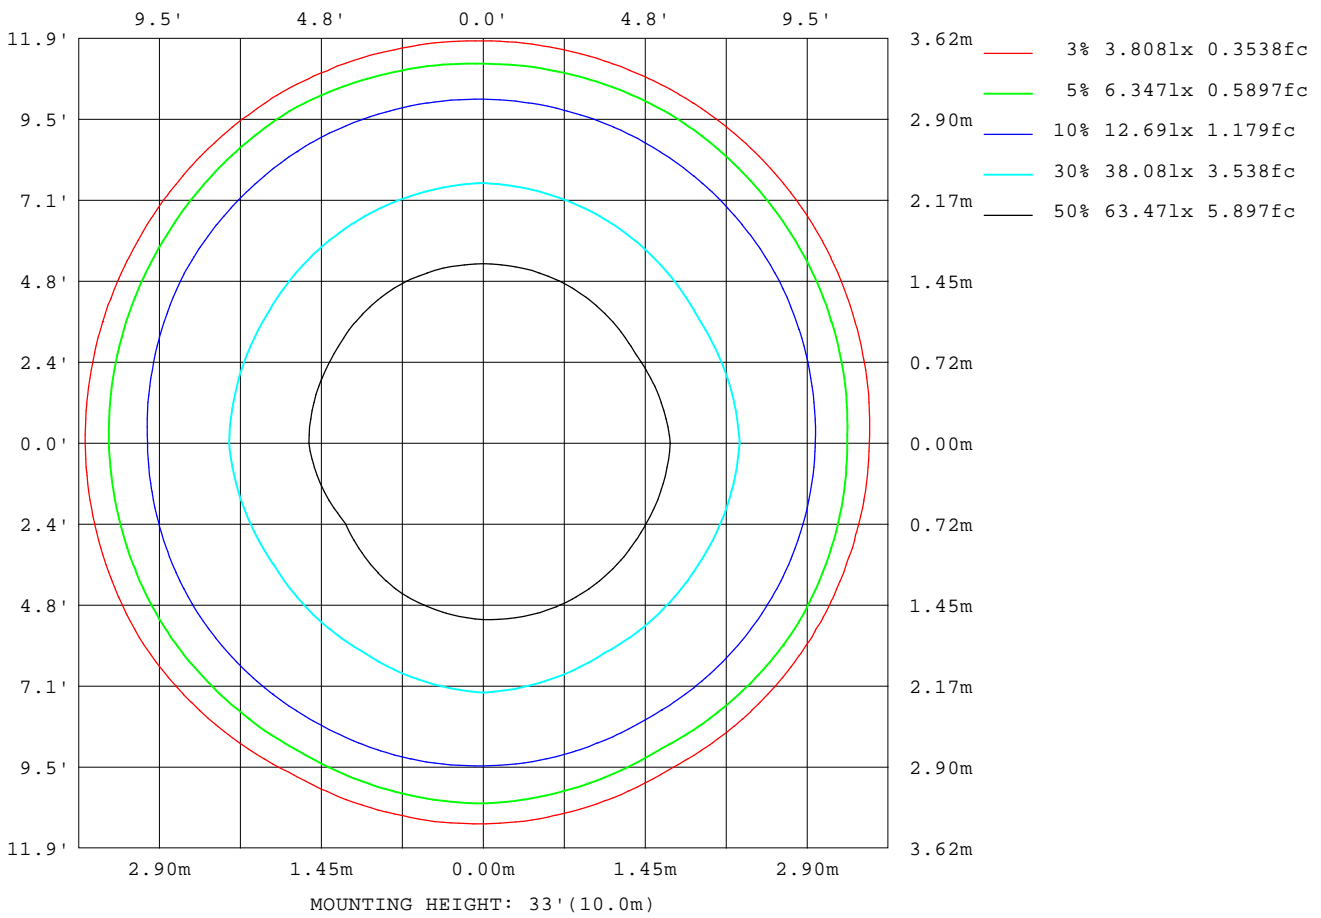

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

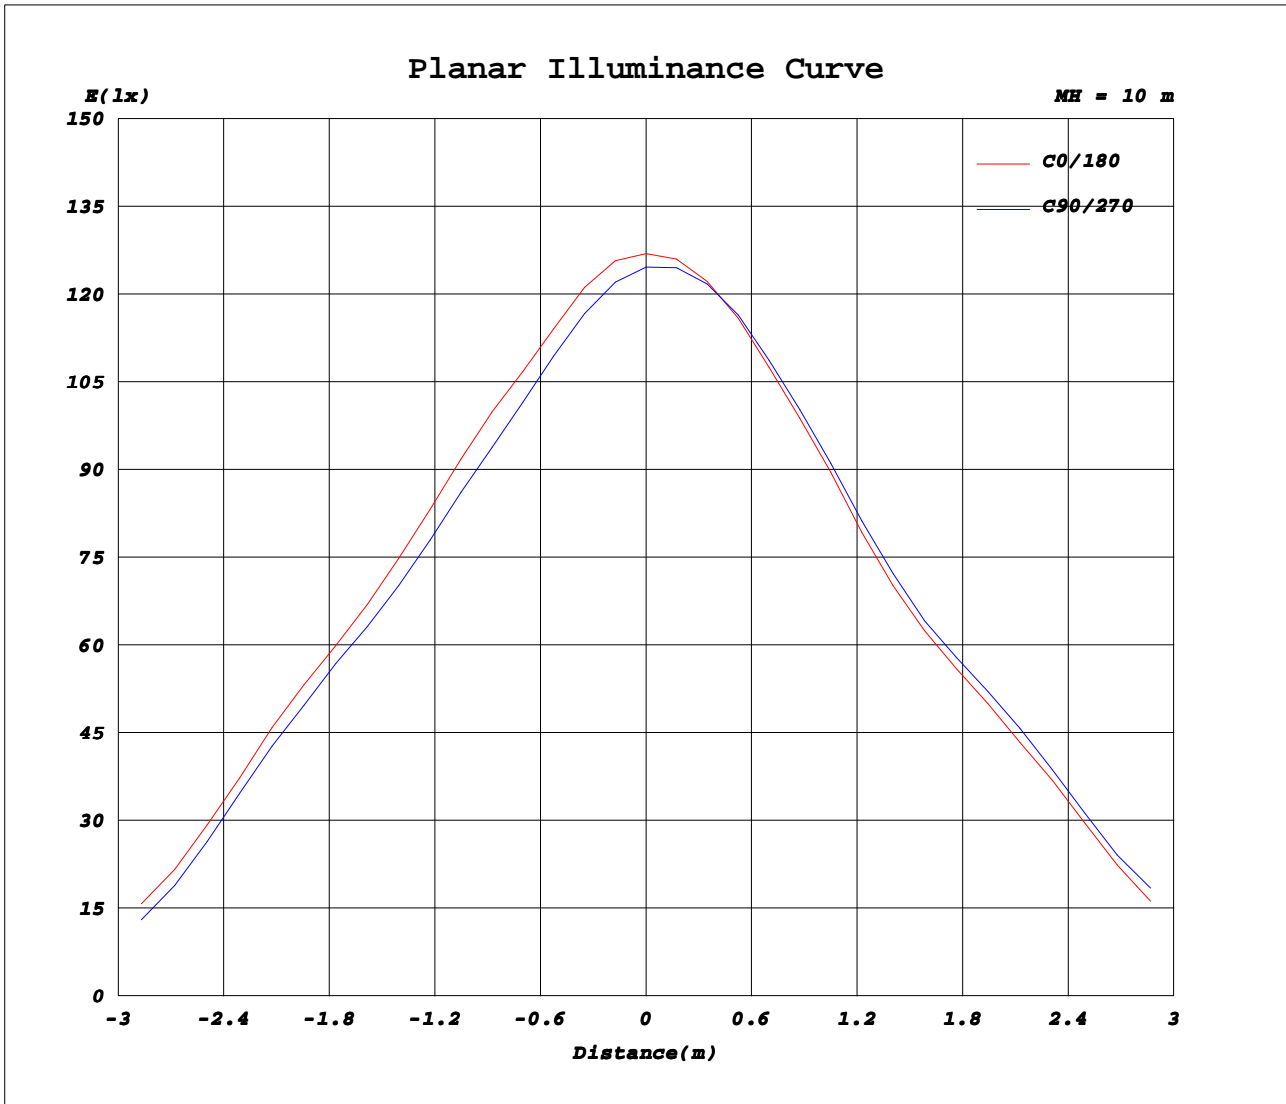

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.9690A P:23.300W PF:1.0000 Freq:0Hz		
Lamp Flux:1673.41x1 lm		
NAME: UL316-36	TYPE: LED	
MFR.: UNMEI LEDS		

Table--1

UNIT: x10cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1269	1263	1256	1246	1227	1198	1269	1263	1256	1246	1227	1198							
5	1010	970	949	949	921	909	999	997	1022	1014	981	939							
10	627	601	595	595	568	533	586	582	594	607	599	595							
15	240	219	204	210	215	231	249	250	265	267	257	242							
20	26.4	22.2	24.1	22.7	25.3	32.9	34.9	38.3	41.0	40.4	35.9	33.9							
25	10.0	9.97	10.0	10.2	11.6	13.9	12.5	12.7	12.8	12.6	13.5	15.2							
30	9.31	9.08	9.50	9.81	10.1	10.9	11.3	10.8	10.9	10.9	11.2	11.9							
35	4.57	4.38	4.26	4.85	4.83	5.53	5.86	5.79	6.02	6.10	6.00	6.27							
40	3.55	3.54	3.53	3.58	3.63	3.69	3.64	3.53	3.62	3.81	3.98	4.32							
45	3.72	3.77	3.78	3.69	3.63	3.55	3.42	3.36	3.43	3.46	3.68	3.89							
50	3.35	3.28	3.20	3.34	3.22	3.27	3.30	3.32	3.36	3.40	3.44	3.36							
55	1.76	1.81	1.67	1.75	1.80	1.97	1.90	1.93	1.96	1.92	1.93	1.88							
60	0.88	0.87	0.84	0.86	0.94	1.06	0.96	0.99	1.03	1.00	1.03	1.08							
65	0.47	0.46	0.44	0.46	0.52	0.58	0.57	0.57	0.58	0.60	0.60	0.68							
70	0.28	0.28	0.27	0.27	0.32	0.36	0.45	0.46	0.46	0.46	0.48	0.55							
75	0.19	0.19	0.18	0.19	0.21	0.24	0.48	0.48	0.48	0.48	0.50	0.54							
80	0.13	0.13	0.13	0.13	0.14	0.16	0.51	0.50	0.50	0.51	0.51	0.54							
85	0.10	0.09	0.09	0.09	0.10	0.10	0.51	0.50	0.50	0.50	0.50	0.51							
90	0.09	0.09	0.09	0.09	0.09	0.09	0.48	0.47	0.48	0.47	0.47	0.47							
95	0.11	0.11	0.11	0.11	0.11	0.11	0.45	0.45	0.45	0.45	0.45	0.44							
100	0.20	0.20	0.20	0.19	0.19	0.18	0.42	0.42	0.42	0.42	0.42	0.42							
105	0.35	0.36	0.36	0.35	0.35	0.33	0.42	0.41	0.41	0.41	0.41	0.42							
110	0.54	0.55	0.54	0.53	0.52	0.51	0.46	0.46	0.45	0.45	0.45	0.46							
115	0.67	0.66	0.66	0.65	0.63	0.62	0.57	0.57	0.56	0.56	0.56	0.56							
120	0.66	0.65	0.64	0.63	0.62	0.62	0.70	0.70	0.69	0.68	0.68	0.69							
125	0.58	0.58	0.56	0.56	0.56	0.55	0.81	0.80	0.79	0.79	0.79	0.79							
130	0.56	0.56	0.56	0.56	0.57	0.56	0.90	0.89	0.88	0.88	0.88	0.89							
135	0.72	0.74	0.75	0.75	0.75	0.74	1.04	1.03	1.01	1.02	1.01	1.03							
140	1.06	1.08	1.09	1.09	1.08	1.07	1.30	1.28	1.26	1.26	1.25	1.27							
145	1.46	1.48	1.48	1.48	1.47	1.45	1.64	1.61	1.59	1.58	1.57	1.58							
150	1.85	1.86	1.86	1.88	1.84	1.83	1.99	1.97	1.94	1.94	1.93	1.93							
155	2.17	2.14	2.15	2.21	2.15	2.14	2.35	2.29	2.28	2.28	2.24	2.20							
160	2.29	2.23	2.24	2.35	2.28	2.28	2.52	2.43	2.47	2.50	2.39	2.29							
165	2.04	1.95	2.02	2.11	2.09	2.06	2.29	2.23	2.31	2.37	2.20	2.06							
170	1.52	1.50	1.52	1.62	1.62	1.64	1.74	1.78	1.77	1.81	1.67	1.62							
175	1.06	1.04	1.04	1.05	1.15	1.20	1.17	1.26	1.25	1.22	1.19	1.14							
180	0.89	0.92	0.93	0.92	0.94	0.95	0.90	0.92	0.94	0.93	0.93	0.95							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: