
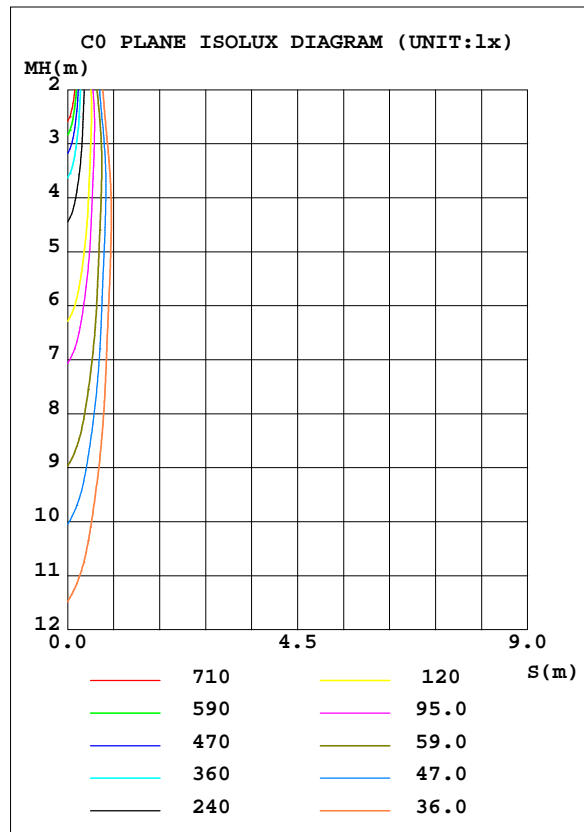


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	5119	S/MH(C0/180)	0.17
NOMINAL POWER(W)	5.7	LOR(%)	100.0	S/MH(C90/270)	0.24
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	430.53	η UP, DN(C0-180)	1.4,52.7
NOMINAL FLUX(lm)	430.53	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7,44.3
LAMPS INSIDE	1	η up(%)	3.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24	η down(%)	97.0	CIBSE SHR MAX	0.20

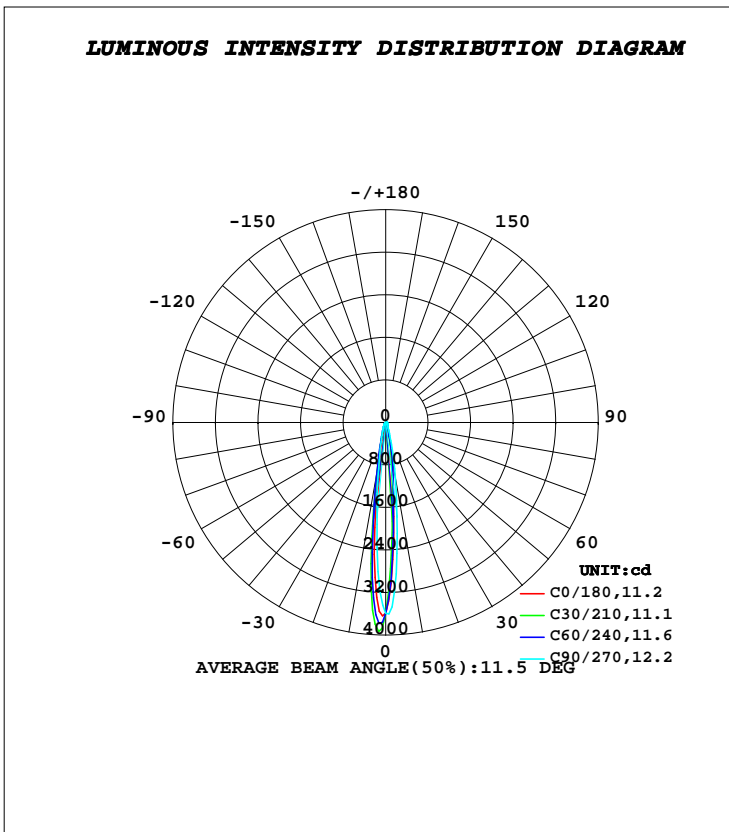

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	657.2	662.1	1053	2049	646.4	961.3	716.9	530.5	0- 10	180.1	180.1	41.8,41.8
20	115.6	128.6	196.2	291.8	129.1	174.9	170.6	141.2	10- 20	104.4	284.5	66.1,66.1
30	53.21	62.71	84.40	105.4	56.10	72.75	84.74	65.50	20- 30	49.96	334.5	77.7,77.7
40	25.44	29.73	41.97	50.84	27.59	35.23	39.63	34.42	30- 40	31.37	365.9	85,85
50	15.41	18.25	25.58	29.50	16.53	21.19	23.19	22.40	40- 50	21.04	386.9	89.9,89.9
60	10.21	11.12	17.48	18.21	10.69	14.15	14.19	14.24	50- 60	15.38	402.3	93.4,93.4
70	4.366	5.055	9.562	9.661	5.206	7.738	7.801	5.798	60- 70	9.994	412.3	95.8,95.8
80	0.6311	0.7677	1.038	2.697	1.662	2.157	2.622	1.649	70- 80	4.144	416.4	96.7,96.7
90	0.1711	0.2130	0.1925	0.2127	0.7939	0.9963	1.271	1.276	80- 90	0.9991	417.4	97,97
100	0.3312	0.5081	0.3941	0.3591	0.7666	0.9545	1.199	1.213	90-100	0.7252	418.1	97.1,97.1
110	1.096	1.277	1.045	0.9006	0.8766	1.058	1.450	1.559	100-110	0.9337	419.1	97.3,97.3
120	1.380	1.653	1.845	1.926	1.305	1.620	2.378	2.516	110-120	1.503	420.6	97.7,97.7
130	1.167	1.485	1.760	1.739	1.671	2.035	2.574	2.658	120-130	1.652	422.2	98.1,98.1
140	2.292	2.964	3.335	2.778	2.341	2.725	3.903	4.333	130-140	1.786	424.0	98.5,98.5
150	3.601	4.354	5.253	4.942	3.449	4.107	5.551	5.882	140-150	2.402	426.4	99,99
160	4.067	4.886	6.401	6.113	4.287	5.140	6.879	6.599	150-160	2.333	428.8	99.6,99.6
170	2.722	3.292	5.126	5.564	3.403	4.128	5.073	4.147	160-170	1.441	430.2	99.9,99.9
180	1.935	2.611	3.518	3.529	1.950	2.603	3.556	3.484	170-180	0.3304	430.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

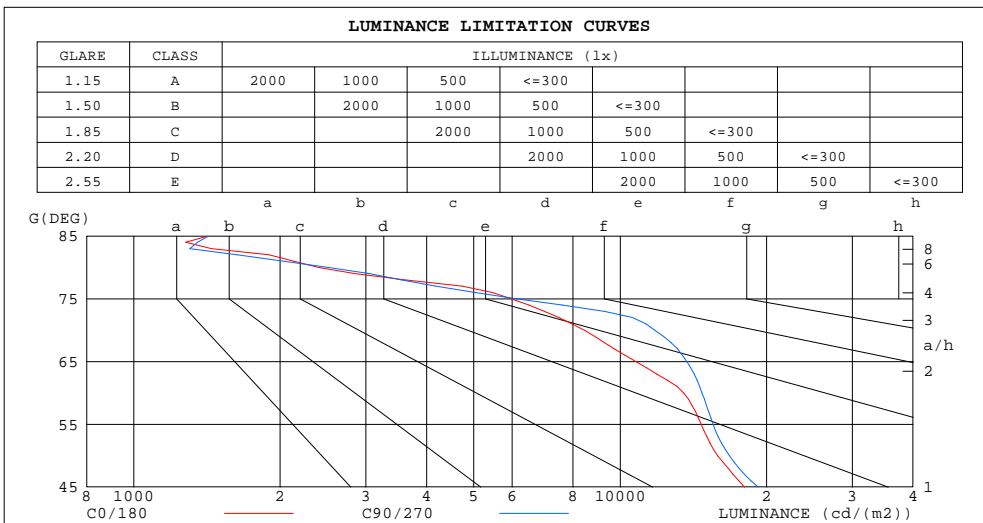

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1417	1423
80	2404	2520
75	5979	6143
70	8443	11786
65	10775	13712
60	13513	14737
55	14676	15533
50	15857	16777
45	18008	19234


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.09	1.06	1.08	1.06	1.05	1.04	1.02	1.01	.99	.98	.97	.96	.95	.94	.92
2.0	1.04	1.01	.98	1.02	.99	.96	.99	.96	.94	.95	.93	.91	.92	.90	.89	.87
3.0	.99	.94	.91	.97	.93	.90	.94	.91	.88	.91	.89	.86	.89	.87	.85	.83
4.0	.94	.89	.86	.93	.88	.85	.90	.87	.84	.88	.85	.82	.86	.83	.81	.80
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.83	.80	.78	.77
6.0	.86	.81	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.81	.78	.75	.74
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.78	.75	.73	.72
8.0	.80	.76	.72	.80	.75	.72	.79	.75	.72	.77	.74	.71	.76	.73	.71	.70
9.0	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.69	.74	.71	.69	.68
10.0	.76	.71	.68	.75	.71	.68	.74	.71	.68	.74	.70	.68	.73	.70	.67	.66

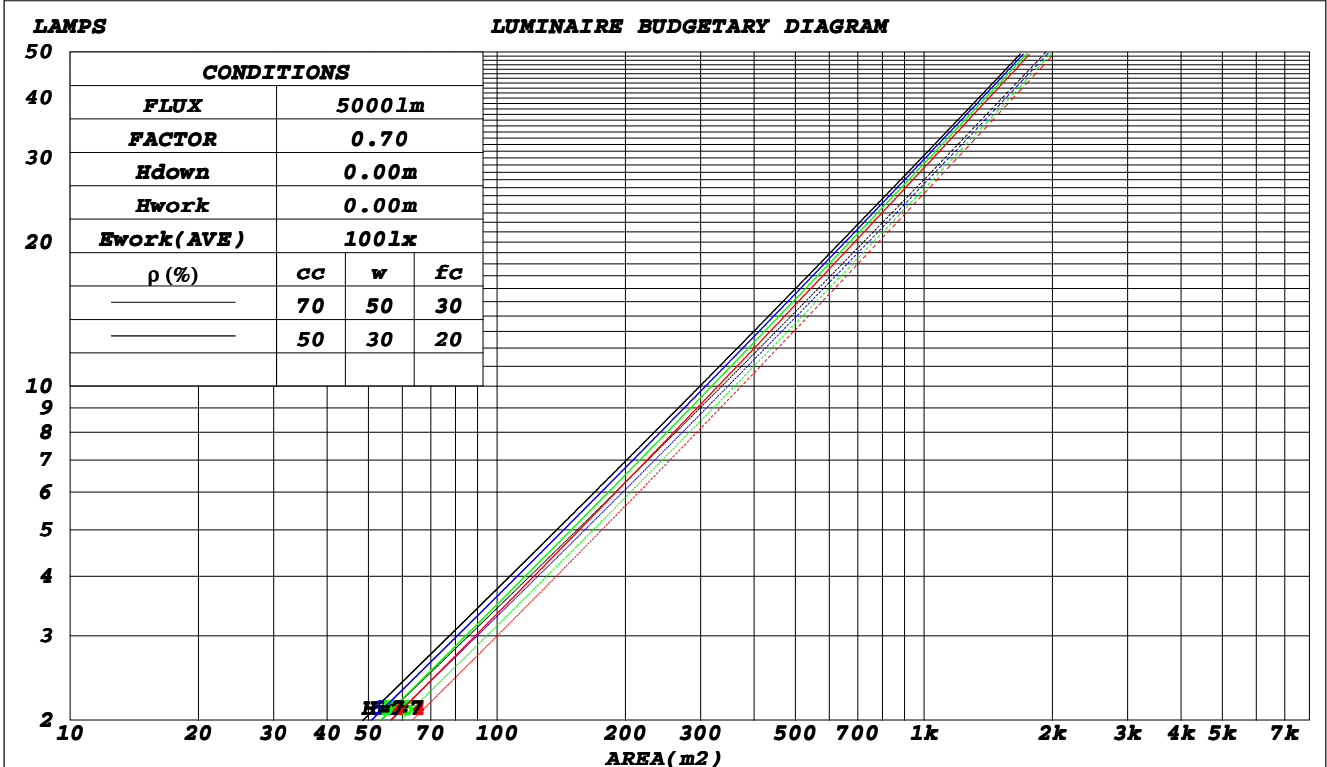

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

WEC AND CCEC

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.163	.093	.029	.155	.089	.028	.141	.081	.026	.128	.074	.024	.116	.067	.022	
2.0	.152	.083	.026	.146	.080	.025	.134	.074	.023	.123	.069	.022	.112	.064	.020	
3.0	.142	.075	.023	.136	.073	.022	.126	.068	.021	.116	.064	.020	.107	.059	.018	
4.0	.132	.068	.020	.127	.066	.020	.118	.063	.019	.110	.059	.018	.102	.056	.017	
5.0	.123	.063	.018	.119	.061	.018	.111	.058	.017	.104	.055	.016	.097	.052	.016	
6.0	.115	.058	.017	.112	.056	.016	.105	.054	.016	.099	.051	.015	.093	.049	.014	
7.0	.108	.054	.015	.105	.052	.015	.099	.050	.014	.094	.048	.014	.088	.046	.013	
8.0	.102	.050	.014	.099	.049	.014	.094	.047	.013	.089	.045	.013	.084	.043	.013	
9.0	.097	.047	.013	.094	.046	.013	.089	.044	.013	.085	.043	.012	.081	.041	.012	
10.0	.092	.044	.012	.089	.043	.012	.085	.042	.012	.081	.040	.011	.077	.039	.011	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.214	.214	.214	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.194	.181	.169	.166	.155	.146	.113	.107	.101	.065	.062	.059	.021	.020	.019	
2.0	.177	.156	.138	.152	.134	.120	.104	.093	.083	.060	.054	.049	.019	.017	.016	
3.0	.163	.137	.116	.140	.118	.101	.096	.082	.071	.056	.048	.042	.018	.016	.014	
4.0	.152	.122	.100	.130	.106	.087	.090	.074	.061	.052	.043	.036	.017	.014	.012	
5.0	.142	.110	.087	.122	.095	.076	.084	.067	.053	.049	.039	.032	.016	.013	.010	
6.0	.133	.100	.077	.114	.087	.067	.079	.061	.048	.046	.036	.028	.015	.012	.009	
7.0	.125	.092	.070	.108	.080	.061	.074	.056	.043	.043	.033	.026	.014	.011	.008	
8.0	.119	.086	.063	.102	.074	.055	.071	.052	.039	.041	.031	.023	.013	.010	.008	
9.0	.113	.080	.058	.097	.070	.051	.067	.049	.036	.039	.029	.022	.013	.009	.007	
10.0	.107	.076	.054	.093	.066	.047	.064	.046	.034	.037	.027	.020	.012	.009	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.0	17.7	17.2	17.9	18.1	17.4	18.1	17.6	18.3	18.5
3H	17.7	18.4	18.0	18.7	18.9	18.4	19.1	18.7	19.3	19.5
4H	17.9	18.6	18.2	18.8	19.1	18.6	19.2	18.9	19.5	19.8
6H	17.9	18.5	18.2	18.8	19.1	18.5	19.1	18.9	19.4	19.7
8H	17.9	18.5	18.2	18.8	19.1	18.5	19.1	18.8	19.4	19.7
12H	17.8	18.4	18.2	18.7	19.1	18.4	19.0	18.8	19.3	19.7
4H 2H	17.3	18.0	17.6	18.3	18.5	17.6	18.3	17.9	18.6	18.8
3H	18.2	18.8	18.6	19.1	19.4	18.7	19.3	19.0	19.6	19.9
4H	18.4	19.0	18.8	19.3	19.7	18.9	19.4	19.3	19.8	20.1
6H	18.4	18.9	18.8	19.3	19.7	18.9	19.3	19.3	19.7	20.1
8H	18.4	18.8	18.8	19.2	19.7	18.8	19.3	19.2	19.7	20.1
12H	18.3	18.7	18.8	19.2	19.6	18.8	19.2	19.2	19.6	20.0
8H 4H	18.4	18.8	18.8	19.2	19.7	18.8	19.3	19.3	19.7	20.1
6H	18.4	18.8	18.9	19.2	19.7	18.8	19.2	19.3	19.6	20.1
8H	18.4	18.7	18.9	19.2	19.7	18.8	19.1	19.3	19.6	20.1
12H	18.3	18.6	18.9	19.1	19.6	18.7	19.0	19.2	19.5	20.0
12H 4H	18.3	18.7	18.8	19.2	19.6	18.8	19.2	19.3	19.6	20.1
6H	18.4	18.7	18.9	19.2	19.7	18.8	19.1	19.3	19.6	20.1
8H	18.3	18.6	18.8	19.1	19.6	18.7	19.0	19.2	19.5	20.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.6					+ 0.4 / - 0.6				
1.5H	+ 0.5 / - 0.4					+ 0.6 / - 0.5				
2.0H	+ 0.8 / - 0.9					+ 1.0 / - 1.3				

CIE Pub.117, 430.5 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.9)
 Area: 0.002 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	82	75	71	82	75	71	81	74	71	67
0.80	90	83	79	89	83	79	88	82	78	74
1.00	95	89	84	94	88	84	92	88	83	79
1.25	99	93	89	98	93	89	96	91	88	83
1.50	102	97	93	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	101	97	94	88
2.50	108	103	100	106	102	99	102	99	96	90
3.00	110	106	102	107	104	101	104	101	99	91
4.00	112	109	106	110	107	104	105	103	101	93
5.00	113	111	109	111	109	107	106	105	103	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

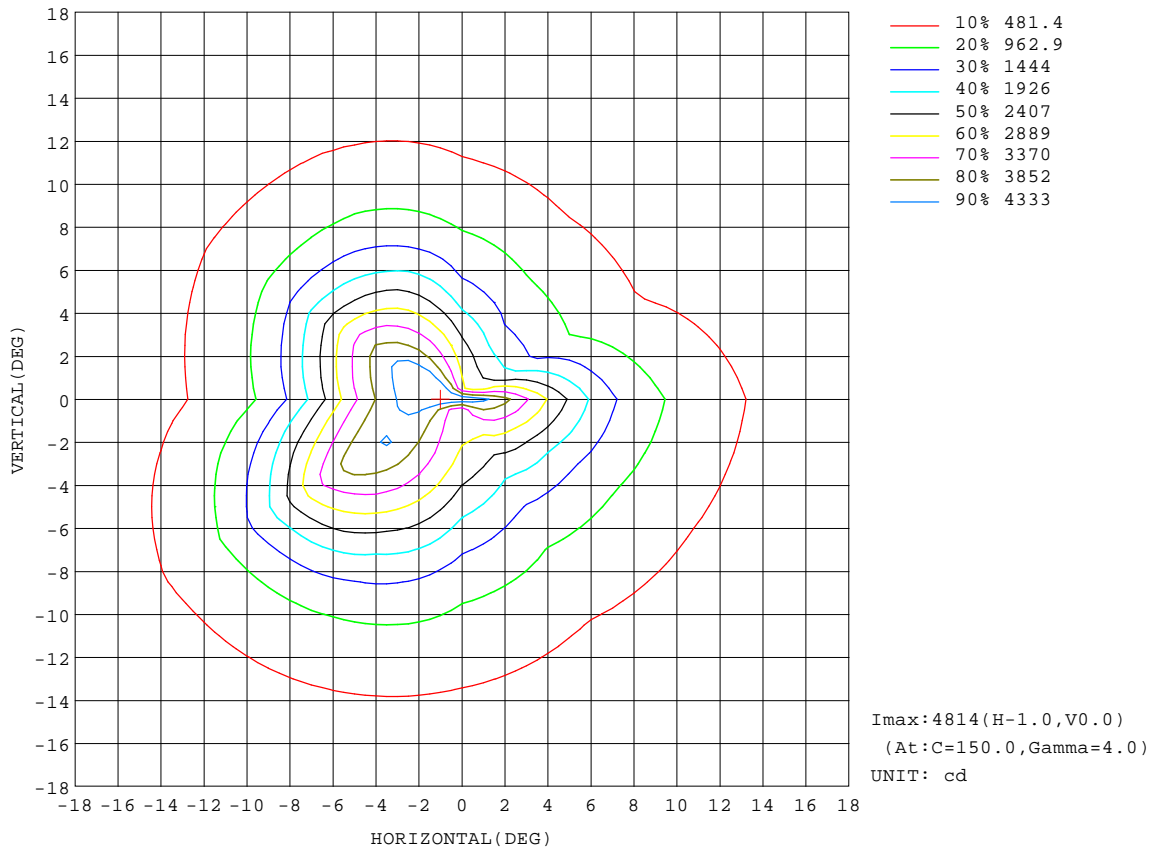


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

Flux out:48.45 lm

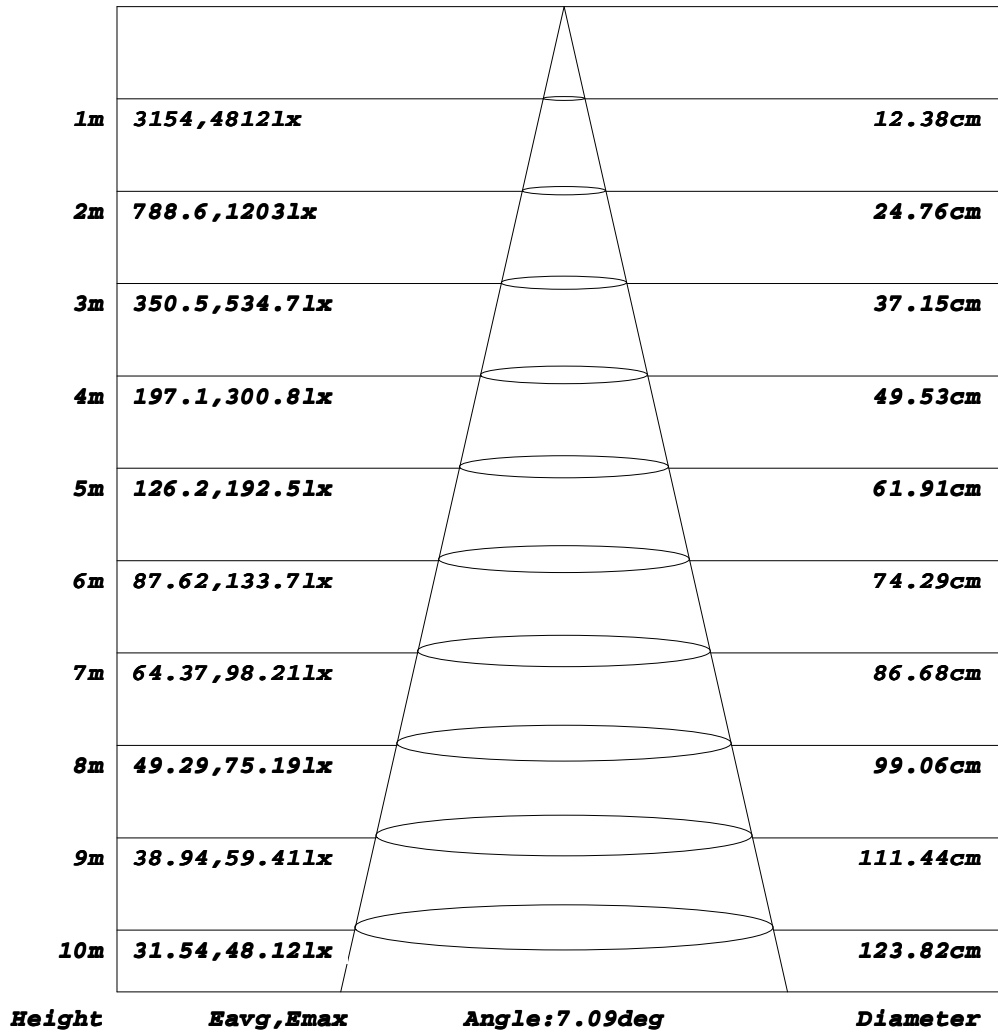


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

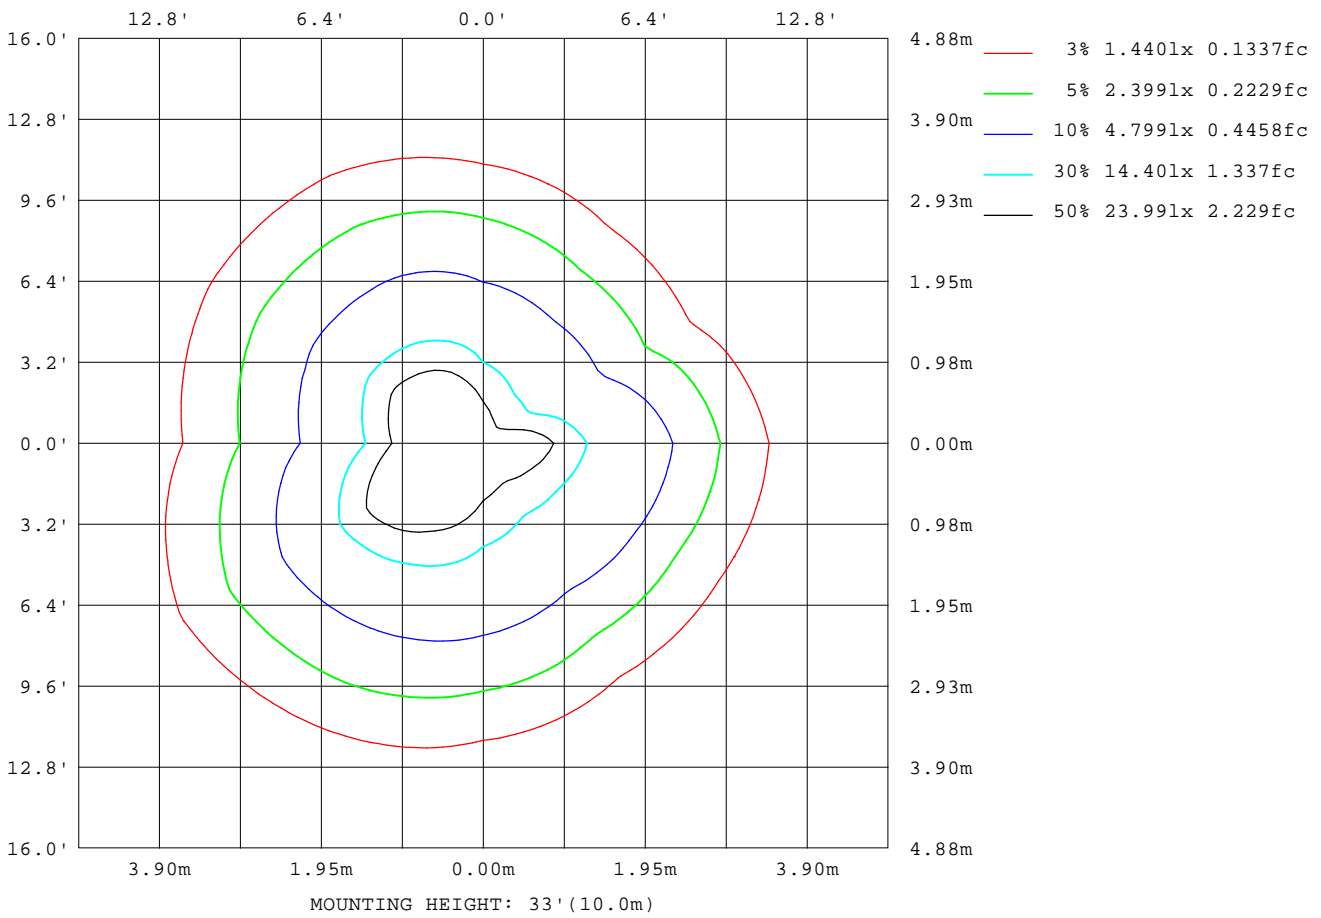

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

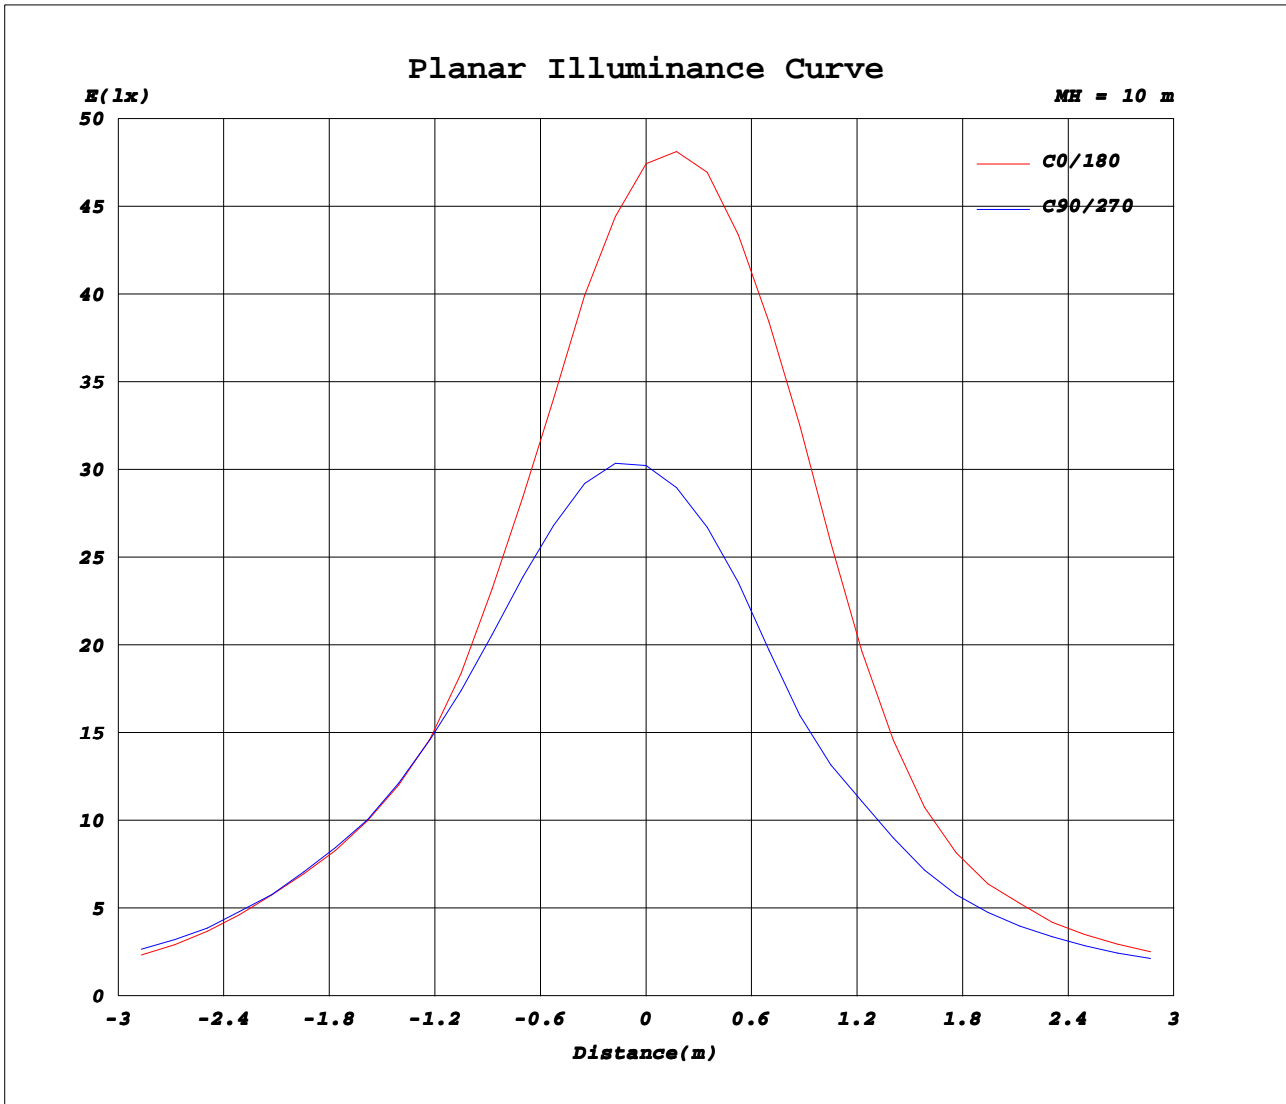

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.2380A P:5.7000W PF:1.0000 Freq:0Hz		
Lamp Flux:430.53x1 lm		
Name: UL316-9A	Type: LED	
MFR.: UNMEI LEDS		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586							
5	1775	1500	1724	2471	3894	5030	2488	3159	2934	1921	1492	1302							
10	657	610	727	1053	1678	2400	646	938	991	717	565	497							
15	246	221	277	424	596	712	249	324	372	323	250	212							
20	116	117	144	196	274	308	129	162	192	171	148	135							
25	78.9	85.5	104	123	150	163	81.2	97.1	117	119	108	93.2							
30	53.2	57.9	68.8	84.4	103	108	56.1	64.4	83.3	84.7	69.6	61.6							
35	35.1	38.5	45.9	58.6	68.9	77.1	38.3	43.8	56.3	56.1	49.3	43.3							
40	25.4	26.4	34.0	42.0	49.9	51.7	27.6	31.4	40.0	39.6	36.4	32.5							
45	19.3	20.8	26.2	32.3	37.8	37.7	21.1	24.0	30.8	30.7	28.6	26.1							
50	15.4	16.0	21.2	25.6	29.6	29.4	16.5	19.0	24.0	23.2	23.2	21.6							
55	12.7	12.4	17.3	21.1	23.9	22.2	13.2	15.6	19.1	17.9	19.0	18.0							
60	10.2	9.61	13.0	17.5	19.5	17.0	10.7	13.1	15.5	14.2	14.1	14.4							
65	6.88	7.16	8.80	13.7	14.8	13.1	7.67	10.5	11.4	10.92	9.80	10.33							
70	4.37	4.71	5.49	9.56	9.69	9.63	5.21	7.73	7.75	7.80	6.39	5.24							
75	2.34	2.46	2.77	3.77	5.82	6.16	3.37	4.29	4.98	4.96	3.67	2.39							
80	0.63	0.86	0.65	1.04	2.56	2.83	1.66	1.82	2.58	2.62	1.80	1.51							
85	0.19	0.31	0.27	0.29	0.52	0.86	0.92	1.15	1.39	1.56	1.41	1.31							
90	0.17	0.24	0.18	0.19	0.22	0.21	0.79	0.89	1.13	1.27	1.31	1.24							
95	0.22	0.37	0.25	0.26	0.26	0.26	0.80	0.89	1.12	1.26	1.25	1.17							
100	0.33	0.59	0.40	0.39	0.37	0.35	0.77	0.86	1.07	1.20	1.24	1.18							
105	0.55	0.89	0.68	0.63	0.55	0.53	0.78	0.85	1.08	1.27	1.36	1.30							
110	1.10	1.38	1.15	1.05	0.90	0.90	0.88	0.95	1.20	1.45	1.58	1.53							
115	1.51	1.76	1.59	1.58	1.43	1.51	1.03	1.10	1.43	1.82	2.09	2.03							
120	1.38	1.61	1.71	1.84	1.84	2.01	1.30	1.41	1.89	2.38	2.60	2.44							
125	1.18	1.31	1.58	1.77	1.86	1.94	1.59	1.74	2.27	2.62	2.65	2.46							
130	1.17	1.31	1.70	1.76	1.74	1.74	1.67	1.82	2.30	2.57	2.69	2.63							
135	1.61	1.89	2.40	2.31	2.01	1.87	1.80	1.89	2.41	2.96	3.40	3.42							
140	2.29	2.67	3.34	3.34	2.92	2.64	2.34	2.43	3.10	3.90	4.37	4.30							
145	3.08	3.47	4.24	4.37	4.03	3.74	2.96	3.12	3.98	4.78	5.22	5.08							
150	3.60	3.95	4.87	5.25	5.08	4.81	3.45	3.67	4.66	5.55	6.00	5.77							
155	3.82	4.21	5.33	5.84	5.77	5.58	3.92	4.17	5.32	6.30	6.72	6.31							
160	4.07	4.25	5.69	6.40	6.27	5.97	4.29	4.57	5.87	6.88	7.03	6.19							
165	3.68	3.51	5.31	6.38	6.46	6.23	4.24	4.57	5.81	6.78	6.27	4.79							
170	2.72	2.72	4.02	5.13	5.37	5.75	3.40	3.82	4.51	5.07	4.54	3.77							
175	2.19	2.36	3.28	3.79	4.19	4.40	2.37	2.86	3.44	3.79	3.78	3.18							
180	1.93	2.22	3.10	3.52	3.65	3.41	1.95	2.27	3.03	3.56	3.62	3.36							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: