


# UL316-Linear-RW



**36W (9 X 4W) - RGBW - 12VAC/24VDC**  
**SUBMERSIBLE OR DRY**  
**CAST 316L SS**  
**REPLACEABLE LEDs**  
**UL CERTIFIED**

Cast 316L Stainless Steel - Replaceable LEDs  
 Removable Yoke, Optional Tripod  
 Submersible or Dry Installation  
 Flush Mount Face Ring  
 SS Niche Optional

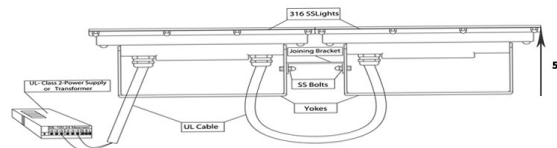

**Specification**

**Description**

Input voltage	12 VAC or 24VDC (24VDC recommended)
Output power	36 watts (9X4W RGBW)
Rendering Index	>70rA (warm white)
Beam angle	25° Optional 45, 60 or custom linear
LEDs	<b>Replaceable</b> - Internal Driver
Material	<b>Cast 316L Stainless Steel</b> Silicone gasket - tempered glass lens
Face ring	316L Flush Mount with Beveled Edge
Color options	RGB-DMX
White	CREE-XPE - 2700K to 6500K
LEDs operating life	> 50,000 hours
IP rating	<b>IP68 - Certified Submersible or Dry</b>
Cable	9 ft. SOW - Cable can be ordered longer and factory connected to adjoining light up to 100W Total
Dimensions	Length 10.6", width 3.7", height 5" to base of yoke
Certifications	cULus CSA22.2 no.89
Installation	Submersible or Dry

