


UL316-Linear



27W (9 X 3W) - RGB-DMX - 12VAC/24VDC
SUBMERSIBLE OR DRY
CAST 316L SS
REPLACEABLE LEDs
UL CERTIFIED

Cast 316L Stainless Steel - Replaceable LEDs
 Removable Yoke, Optional Tripod
 Submersible or Dry Installation
 Flush Mount Face Ring
 SS Niche Optional

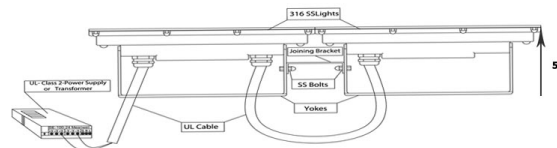

Specification

Description

Input voltage	12VAC or 24VDC
Output power	27 watts (9X3W RGB)
Rendering Index	>70rA (warm white)
Beam angle	25° Optional 45, 60 or custom linear
LEDs	Replaceable - Internal Driver
Material	Cast 316L Stainless Steel Silicone gasket - tempered glass lens
Face ring	316L Flush Mount with Beveled Edge
Color options	RGB-DMX
White	CREE-XPE - 2700K to 6500K
LEDs operating life	> 50,000 hours
IP rating	IP68 - Certified Submersible or Dry
Cable	9 ft. SOW - Cable can be ordered longer and factory connected to adjoining light up to 100W Total
Dimensions	Length 10.6", width 3.7", height 5" to base of yoke
Certifications	cULus CSA22.2 no.89
Installation	Submersible or Dry

