


UL316-ORION

Optional flange 4" OD



**5W (1 X 5W) - CREE RGBW-DMX,
WHITE * 5W - 12VAC/24VDC
SUBMERSIBLE OR DRY
CAST 316L SS - OPTIONAL FLANGE
REPLACEABLE LEDs
UL CERTIFIED FOR SWIMMING POOLS**

Cast 316L Stainless Steel - Replaceable LEDs
Submersible or Dry Installation
Optional flange and SS Niche

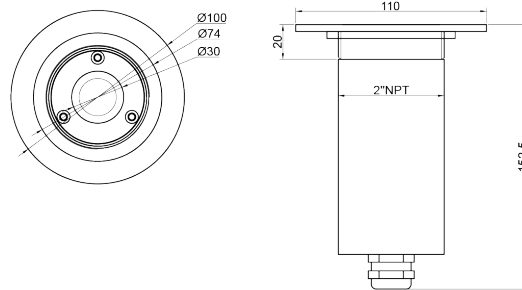

Specification	Description
Input voltage	12VAC or 24VDC
Output power	1 x 5W CREE RGBW-DMX or WHITE
Rendering Index	>70rA (warm white)
Beam angle	10°-20, 45, 60, 90 - Bead lens 30, 60, 90
LEDs	Replaceable - Internal Driver
Material	Cast 316L Stainless Steel Silicone gasket - tempered glass lens
Flange	Optional w/ lock nut - black or mirror polish SS
Color options	RGB-DMX or RGBW (3000K, 4000K, 6000K)
White	CREE-XPE - 2700K to 6500K
LEDs operating life	> 50,000 hours
IP rating	IP68 - Certified Submersible or Dry
Cable	9 FEET - SOW 18/5 Longer cable can be ordered
Dimensions	2"MNPT x 5 3/16"
Certifications	cULus - CSA22.2 no.89 - including swimming pools and splash pads - meets 680 standards
Installation	Threads into 2" NPT, suspend by flange, or niche mount

