


# UL316R-40RW

**40W (10 X 4W) - RGBW-DMX - 24VDC**  
**SUBMERSIBLE OR DRY**  
**CAST 316L SS**  
**REPLACEABLE LEDS**  
**UL CERTIFIED FOR SWIMMING POOLS**

Cast 316L Stainless Steel - Replaceable LEDs  
 Submersible or Dry Installation  
 SS Flush Mount Mirror Polish Face Ring - center opening 1.85"  
 Optional SS threaded adapter to fit 1" nozzle, 1 1/2" pipe



Optional insert  
 1 1/2"FNPT x 1"FNPT

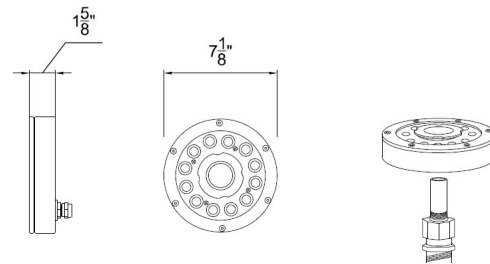

Specification	Description
Input voltage	24VDC
Output power	40 watts (10X4W)
Rendering Index	>70rA (warm white)
Beam angle	15°, 30 - Bead lens 20, 30, 45
LEDs	<b>Replaceable</b> - Internal Driver
Material	<b>Cast 316L Stainless Steel</b> Silicone gasket - tempered glass lens
Face ring	316L SS Flush Mount
Color options	RGBW (3000K, 4000K, 6000K)
White	CREE-XPE - 2700K to 6500K
LEDs operating life	> 50,000 hours
IP rating	<b>IP68 - Certified Submersible or Dry</b>
Cable	9 FEET - SOW 18/5 Longer cable can be ordered
Dimensions	Diameter 7.08"x 1.4"H center opening 1.85"
Certifications	cULus CSA22.2 no.89 - including swimming pools and splash pads - meets 680 standards
Installation	Submersible or Dry - optional SS threaded adapter to fit 1" nozzle, 1 1/2" pipe

