



UL316R-40RW

40W (10 X 4W) RGBW-DMX - 12VAC OR 24VDC
DRY OR SUBMERSIBLE
CAST 316L SS - RING LIGHT

Cast Stainless Steel
 Replaceable LEDs
 Wet or Dry Installation
 Matte Finish Face Ring or Mirror Polish

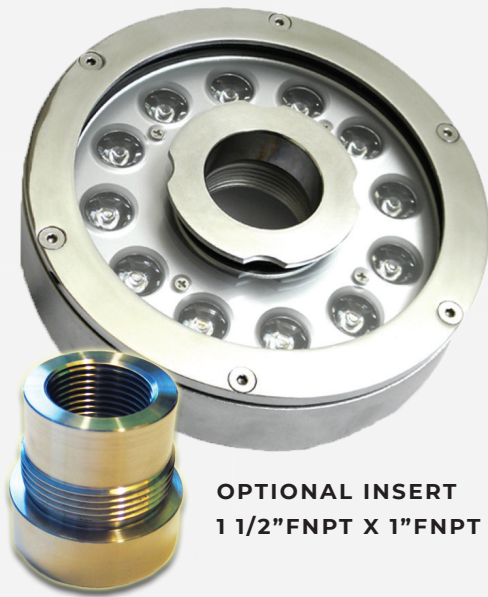

OPTIONAL INSERT
1 1/2" FNPT X 1" FNPT



Specification	Description
Input voltage	12VAC or 24VDC
Output power	40 watts (10X4W)
Luminous flux output	100 to 110 lm/W
Rendering index	>70rA (warm white)
Beam angle	25° OPTIONAL 5°, 45°
LEDs	Replaceable - Internal Driver
Material	Cast 316L STAINLESS STEEL silicone gasket - tempered glass lens
Face ring	Standard 'sparkle matt' SS or mirror polish w/ niche
Color option	RGBW(6000K) standard or RGBWW(2700K)
White	CREE- XPE - 2700K TO 6500K
LEDs operating life	> 50,000 hours REPLACEABLE LEDs
IP rating	IP68 - CERTIFIED SUBMERSIBLE OR DRY
Cable	9 FEET- SOW 18/5
Dimensions	Diameter 7.08"x 1.4"H
Certification	cULus CSA22.2 no.89 - including swimming pools and splash pads
Installation	Submersible or Dry

