


# VITRO

**White - RGB - RGBW - 24VDC  
316L SS and polycarbonate  
Submersible or Dry**

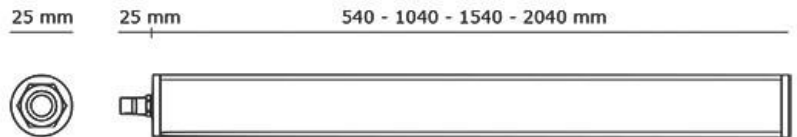

Custom lengths may be available according to quantity

## Specifications

<b>Input voltage</b>	<b>24VDC</b>
<b>Output power</b>	<b>RGBW- 19W/M RGB 15W/M, 10 W/M</b>
<b>Luminous flux output</b>	<b>105 TO 130 lm/W</b>
<b>Rendering Index</b>	<b>&gt;80</b>
<b>Lens Degree options</b>	<b>Transparent diffuser 104°</b>
<b>Material</b>	<b>316L Stainless Steel - Transparent Polycarbonate</b>
<b>lm/W</b>	<b>121 LM/W (2700K) TO 162 lm/W(5200K)</b>
<b>Color options</b>	<b>RGBW RGB and White</b>
<b>Chromatic Selection</b>	<b>2 step MacAdam</b>
<b>LEDs operating life</b>	<b>&gt; 50,000 hours</b>
<b>IP rating</b>	<b>IP 66, IP 68</b>
<b>Cable</b>	<b>9 Foot- 18AWG power plus 3 or 4 wires 20AWG for colors</b>
<b>Dimensions</b>	<b>22.44" (570mm), 42.12" (1070mm) ,61.81" (1570mm) 81.49"(2070mm) x 0.98" (25mm)</b>
<b>Certifications</b>	<b>cULus for fountains, water features, indoor or outdoors</b>
<b>Feature</b>	<b>Double polycarbonate shell with water tight factory seal</b>
<b>Installation</b>	<b>Surface mounted ( wall, floor, ceiling) submersible to 10M</b>
<b>Weight</b>	<b>572gm/M</b>

