




EK 1

EK 1 IS A LINEAR SYSTEM THAT IS SUITED FOR INDOOR, OUTDOOR OR SUBMERSED APPLICATIONS .

Consider this beautiful accent strip of light for hotels, nightclubs and casinos, steps, in or surrounding fountains and pools. The optional aluminum recessing box for out of water installations offers additional lengths of 59" and 79" in whites and RGB

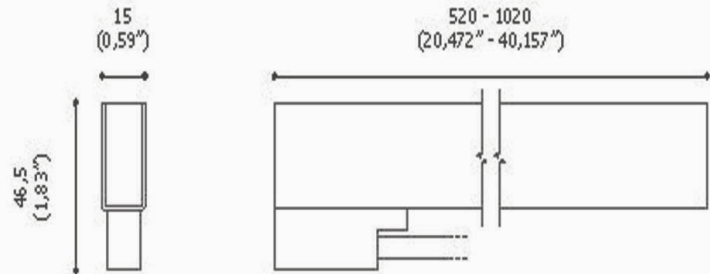

Specification

Description

Input voltage	24VDC- Constant voltage
LED color options	2700k, 3000k,3300k,3700k,5200k,RGB, RGB CHASE
Wattage options	20.4" 8W, 40.15"15W, - ON/OFF-Dimmable white
Rendering Index	>80
Luminous efficiency	140 TO 180 lm/W
Lens Degree options	Transparent (45°) - opal diffused (109°)
Body	Satin 316L Stainless Steel
Recessing box	316L Stainless Steel...
Chromatic Selection	3 step MacAdam
IP rating	IP68 -30M (98.4FT)
Dimensions	In trimless recessing box 67.3mm(2.64")H X 36.2mm(1.42")W
Lengths	520mm (20.47"), 1020mm (40.15")
Installation	Recessed in wall, floor or submersed
Static load resistance	2000kg (4,409 lbs)- IK10
Weight per meter	1100g (38.80oz)
Certifications	cULus 969, CSA22.2 no.89 ,UL8750, UL676

