


Flexi P

PROFESIONAL FLEXIBLE LINEAR LED WHITES, RGB, OR RGBW- 24VDC TOP OR SIDE BEND AVAILABLE


Flexi P is designed for curved or straight installations to enhance building facades, restaurants, hotels, columns, fountains, indoors and out. Installation is simple using our SS clips. It is possible to cut the light fixtures and seal with the end caps on site but we cannot guarantee the IP rating unless sealed at the factory.

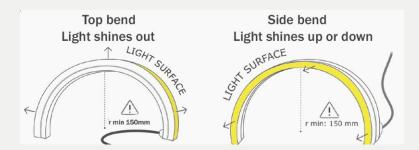

Specification	Description
Input voltage	24VDC- Constant voltage
Wattage-RGB-DMX version	20" 9W, 39" 18W, 79" 36W, 197" 90W
White color options	2700k, 3000k,3500k,4500k
Wattage white options	20" 5W, 39"10W, 79" 20W, 197"50W- ON/OFF-Dimmable
Rendering Index	>80
Luminous efficiency	98 lm/W
Lens Degree options	Narrow beam 11°, 15°, medium beam22°,27°,30°, wide beam 37°,42°,45°
Body	Flexible resin encapsulated- UV resistant
Radius	Flexible radius to 150mm (5.9")
Chromatic Selection	3 step MacAdam
IP rating	IP66/IP68 IK08- recommend above water line for long term installation
Dimensions	12mm (0.472")W x 33mm(1.299") H
Certifications	cULus 969, CSA22.2 no.89 ,UL8750, UL676
Installation	SS spring type clips - 16mm (0.629")W \times 6.2mm(0.244") recommended spacing every 250mm (9.84")
Weight per meter	300g. (10.58oz)






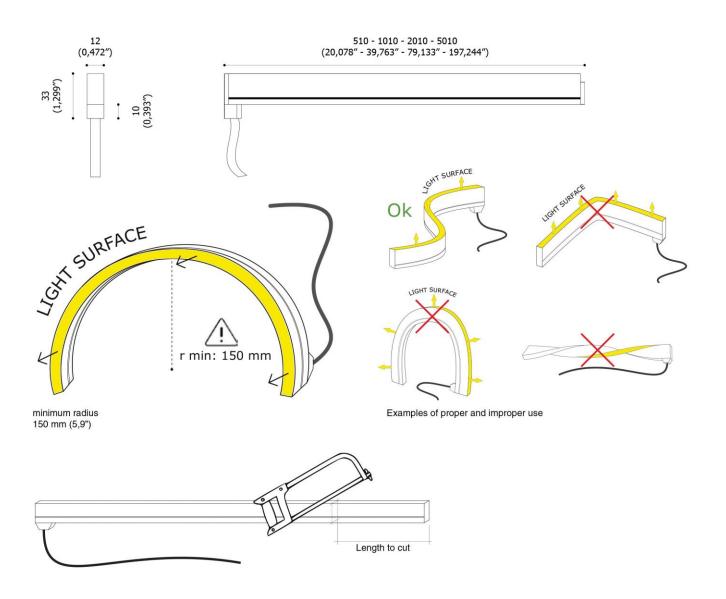


ACCESSORIES

ACC.0189.0


fixing spring (5 pieces package)






ACC.0266.0


Sealing kit with gun Including: a dispensing gun, one cartridge of bi-component fast resin, two mixing spouts, two containing elements for resin



ACC.0267.0

Sealing kit Including: one cartridge of bi-component fast resin, two mixing spouts, two containing elements for resin.




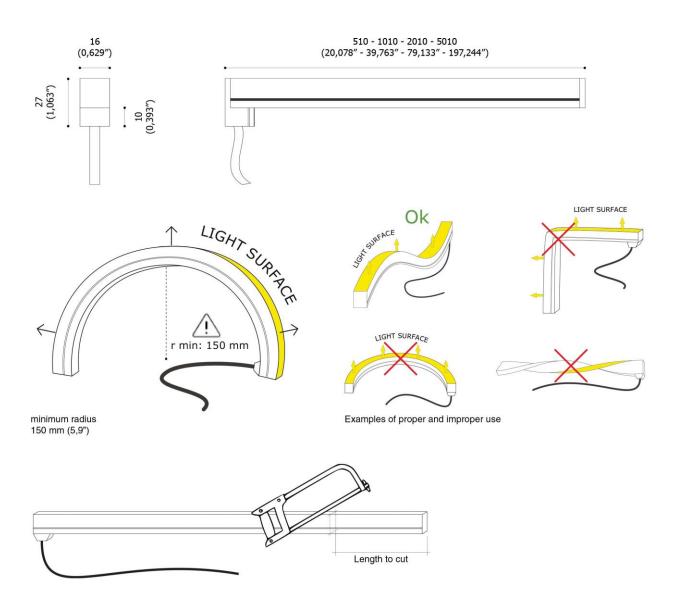


ACCESSORIES

ACC.0216.0


fixing spring (5 pieces package)





ACC.0266.0

sealing kit with gun Including: a dispensing gun, one cartridge of bi-component fast resin, two mixing spouts, two containing elements for resin.



ACC.0267.0

sealing kit

Including: one cartridge of bi-component fast resin, two mixing spouts, two containing elements for resin.

