


Mystique

WHITE OR RGB - 24VDC
316L SS AND POLYCARBONATE
SUBMERSIBLE OR DRY



Specification	Description
Input voltage	24VDC
Output power	12W/M- White (pitch 100), 24W/M (pitch 50) or 15W/M-RGB(PITCH 20)
Luminous flux output	105 TO 130 lm/W
Rendering Index	>80
Lens Degree options	Transparent diffuser 104°
Material	316L Stainless Steel - Transparent Polycarbonate
lm/W	121 LM/W (2700K) TO 162 lm/W(5200K)
Color options	2700K, 3000K, 4000K, 5200k, RGB, Dimmable
Chromatic Selection	2 step MacAdam
LEDs operating life	> 50,000 hours
IP rating	IP68
Cable	1Meter 18AWG including dedicated wire for dimming
Dimensions	22.44" (570mm), 42.12" (1070mm) ,61.81" (1570mm) 81.49"(2070mm) x 0.98" (25mm)
Certifications	cULus
Feature	Double polycarbonate shell with water tight factory seal
Installation	Surface mounted (wall, floor, ceiling) submersible to 10M
Weight	572gm/M

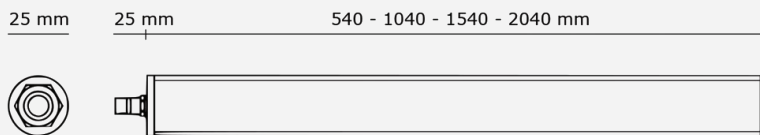