




Sparkle

SPARKLE IS A RECESSED FIXTURE SUITABLE FOR INDOOR, OUTDOOR OR UNDERWATER INSTALLATIONS.

Pathways, public squares, hotels, private homes, pools, and fountains. Wherever you need to add a little sparkle of light.

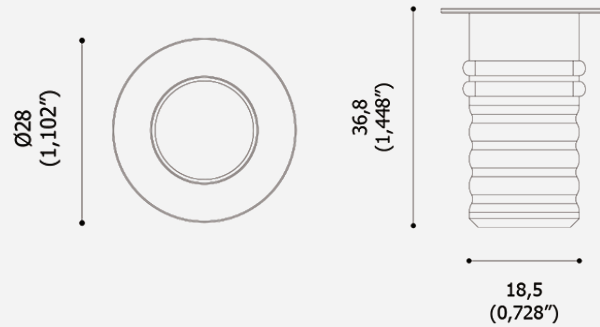

Specification	Description
Input voltage	24VDC Constant Voltage
Output power	0.5W
Luminous flux output	140 TO 180 lm/W
Rendering Index	>80
Lens Degree options	Transparent 99° or 90° opal diffuser
Material	Satin Stainless Steel
Load Resistance	Walk-over up to 500kg. (1,102 lbs)
Color options	2700K, 3000K, 3300K, 3700k,5200k, Dimmable
Chromatic Selection	3 step MacAdam
LEDs operating life	> 50,000 hours
IP rating	IP68 to 10M (32.8 ft)
Cable	For pool applications 5M (16.4 ft)
Dimensions	FACE 1.102" x 1.448"H-Base OD 0.728"
Recessing box	2.36" x 0.94" or with draining 3.54" x 3.54"
Certifications	cULus swimming pools
Feature	Square or round face
Installation	Wall or ground in recessing box Wet niche for pools
Weight	75gm (2.64 oz.)

