


UL316R-108

108W (36 X 3W) - (3 IN 1) RGB-DMX - 24VDC
SUBMERSIBLE
CAST 316L SS
REPLACEABLE LEDS
UL CERTIFIED FOR FOUNTAINS

RGB-DMX (3 IN 1)
 Cast 316L Stainless Steel - Replaceable LEDs
 SS Flush Mount Face Ring
 Center opening 3.15"
 3 x SS bolts for pipe mount installation

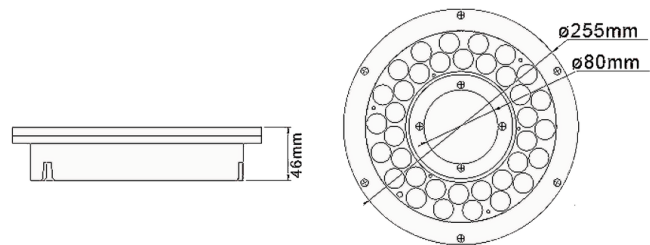

Specification	Description
Input voltage	24VDC
Output power	108 watts (36X3W)
Rendering Index	>70rA (warm white)
Beam angle	20°, 60, 90 - Bead lens 30, 60, 90
LEDs	Replaceable - Internal Driver
Material	Cast 316L Stainless Steel Silicone gasket - tempered glass lens
Face ring	316L SS Flush Mount
LED chip	Edison 36 x 3W (3 IN 1) RGB-DMX, Optional 36 x 3W white
LEDs operating life	> 50,000 hours
IP rating	IP68 - Certified Submersible
Cable	9 FEET - SOW 18/5 Longer cable can be ordered
Dimensions	255mm (10.03") x 46mm (1.8" H) 80-mm (3.15") center opening
Weight	8kgs
Certifications	cULus - UL676, CSA C22.2 No. 89-15
Installation	Submersible only - 3 center SS bolts for pipe mount
RDM (optional add-on)	Standard DMX-512 - 3 channel addressing with coder or optional remote addressing with standard RDM controller and RDM add-on

