


# UL316R-144RW



**144W (36 X 4W) - RGBW - 24VDC**  
**SUBMERSIBLE**  
**CAST 316L SS**  
**REPLACEABLE LEDS**  
**UL CERTIFIED FOR FOUNTAINS**

RGBW-DMX  
 Cast 316L Stainless Steel - Replaceable LEDs  
 316L SS Flush Mount Face Ring  
 Center opening 3.15"  
 3 x SS bolts for pipe mount installation

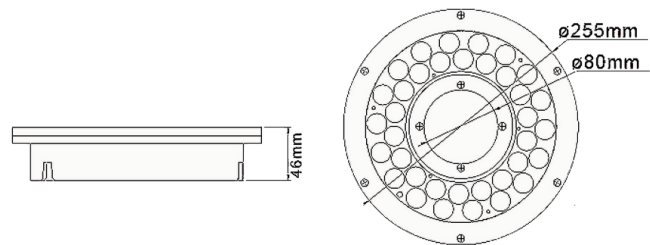

Specification	Description
Input voltage	24VDC
Output power	144 watts (36X4W)
Rendering Index	>70rA (warm white)
Beam angle	20°, 45, 60, 90 - Bead lens 30, 60, 90
LEDs	<b>Replaceable</b> - Internal Driver
Material	<b>Cast 316L Stainless Steel</b> Silicone gasket - tempered glass lens
Face ring	316L SS Flush Mount
LED chip	Cree 36 x 4W (4 in 1) CREE RGBW (3000K, 4000K, 6000K)
LEDs operating life	> 50,000 hours
IP rating	<b>IP68 - Certified Submersible</b>
Cable	9 FEET - SOW 18/5 Longer cable can be ordered
Dimensions	255mm (10.03") x 46mm (1.8" H) 80mm (3.15") center opening - optional larger slab hanger style face ring
Weight	8kgs
Certifications	cULus - UL676, CSA C22.2 No. 89-15
Installation	Submersible only - 3 center SS bolts for pipe mount
RDM (optional add-on)	Standard DMX-512 - 4 channel addressing with coder or optional remote addressing with standard RDM controller and RDM add-on

